



European P.C.B. type terminal blocks / EK series

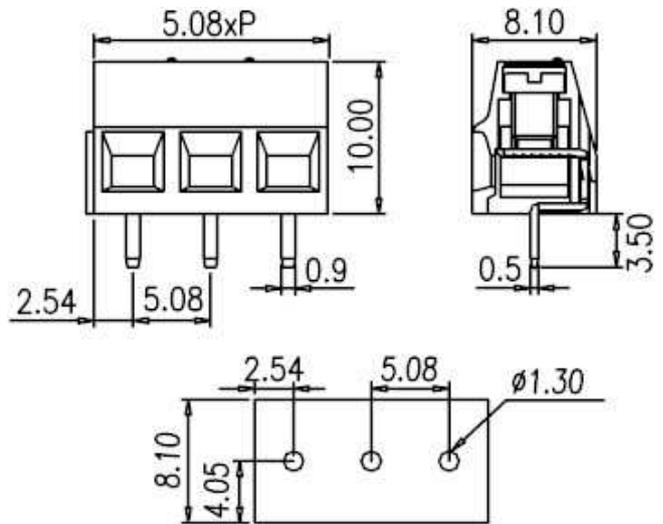

**ELK508V-..P(B)**

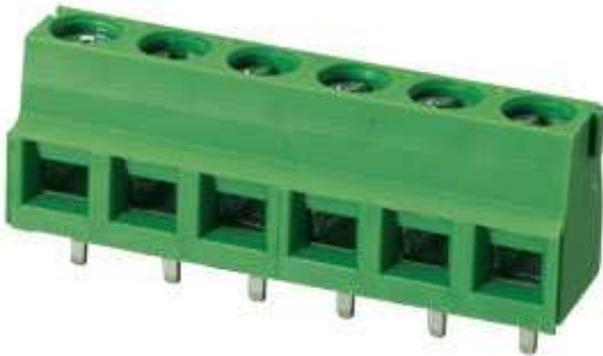

**Pitch: 5.08mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	13.5A	14A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	30~16 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	30~16 / 0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 4 KV	
Torque (N-m)	0.50	
Screw	M3	
Wire strip length	6~7mm	
<b>Pole</b>	<b>Cat. No.</b>	
02	ELK508V-02P(B)	
:	:	
:	:	
17	ELK508V-17P(B)	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw