


European P.C.B. type terminal blocks / EK series



**EK500V2L**

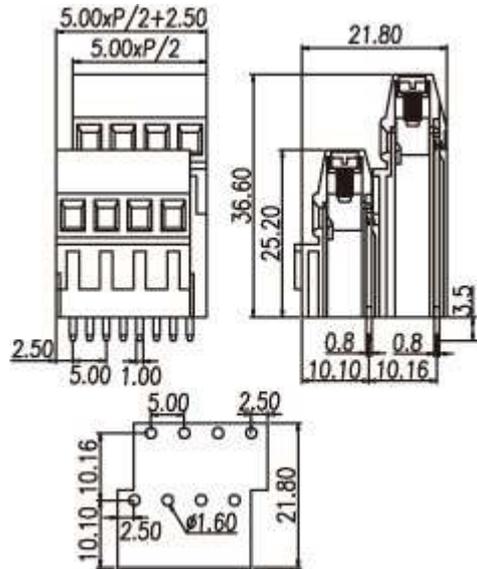

**Pitch: 5.00mm**

Approval	<b>UL</b> <b>CE</b>	
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	20A	10A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	24~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	24~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 4 KV	
Torque (N-m)	0.50	
Screw	M2.5	
Wire strip length	6~7mm	
<b>Pole</b>	<b>Cat. No.</b>	
2x2	EK500V2L-04P	
3x2	EK500V2L-06P	
:	:	
:	:	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw