


Clamp Spring - Spring type terminal blocks / WSK series



WSKA100-..P2

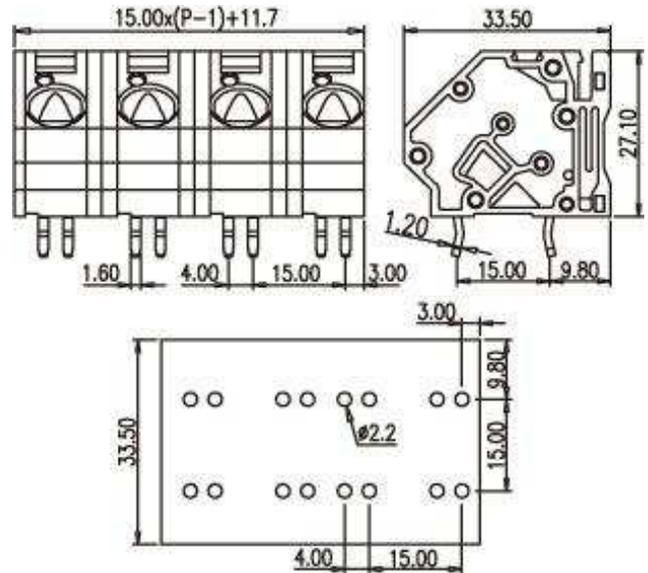

Pitch: 15.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V / 600V	1000V
Rated current	57A / 5A	76A
Conductor cross-section, solid (AWG/ mm ²)	24~6 / 0.5~16	
Conductor cross-section, flexible (AWG/ mm ²)	24~6 / 0.5~16	
Insulation voltage (UL/IEC/Max.)	2.2 / / KV	
Wire strip length	14~15mm	
End Cover		
Pole	Cat. No.	
02	WSKA100-02P2	
03	WSKA100-03P2	
:	:	
:	:	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw