



Clamp Spring - Spring type terminal blocks / WSK series

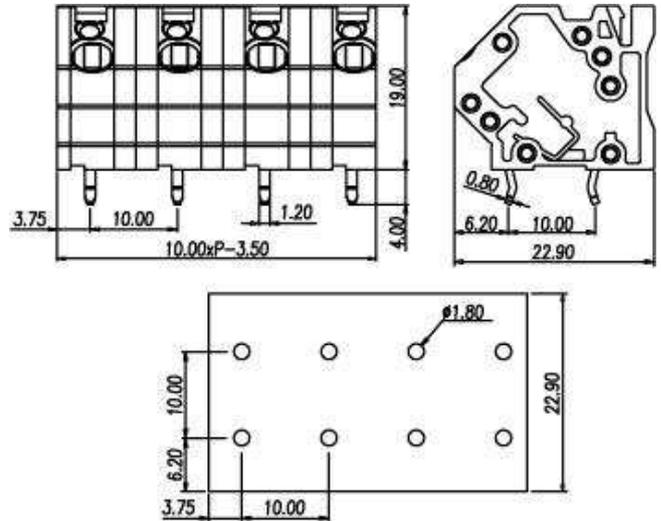

WSKA500(S)-..P2

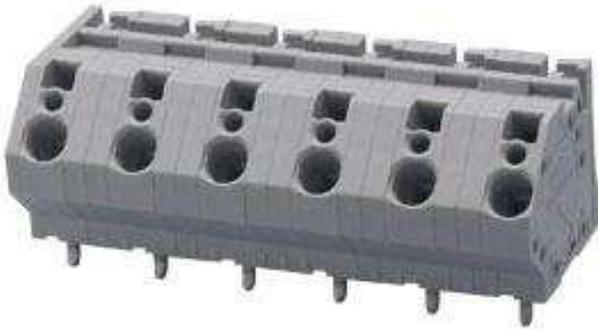

Pitch: 10.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	1000V
Rated current	15A	24A
Conductor cross-section, solid (AWG/ mm ²)	28~12 / 0.5~4	
Conductor cross-section, flexible (AWG/ mm ²)	0.5~4	
Insulation voltage (UL/IEC/Max.)	1.6 / / KV	
Wire strip length	10~11mm	
End Cover		
Pole	Cat. No.	
02	WSKA500(S)-02P2	
03	WSKA500(S)-03P2	
:	:	
:	:	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw