


Clamp Spring - Spring type terminal blocks / WSK series



WSKA750(S)

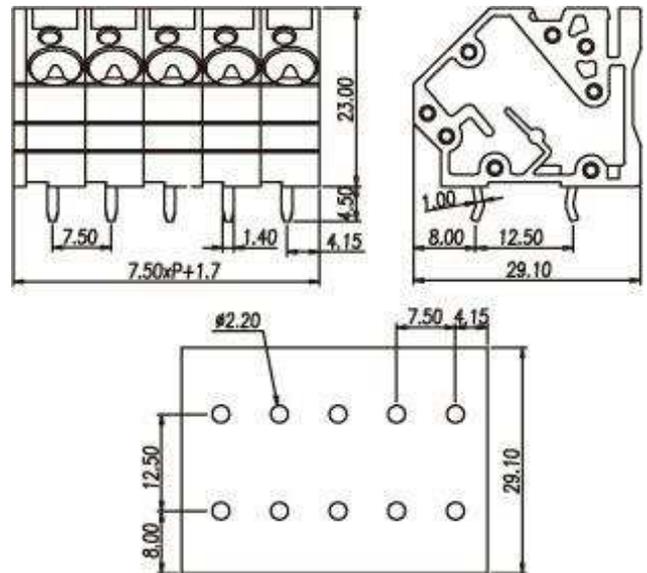

Pitch: 7.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	750V
Rated current	30A	57A
Conductor cross-section, solid (AWG/ mm ²)	/ 0.5~6	
Conductor cross-section, flexible (AWG/ mm ²)	26~10 / 0.5~6	
Insulation voltage (UL/IEC/Max.)	1.6 / 3 / KV	
Wire strip length	14~15mm	
End Cover		
Pole	Cat. No.	
02	WSKA750(S)-02P	
03	WSKA750(S)-03P	
:	:	
:	:	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw