


**Clamp Spring - Spring type terminal blocks / WSK series**



**WSKA750(S)-..P1**

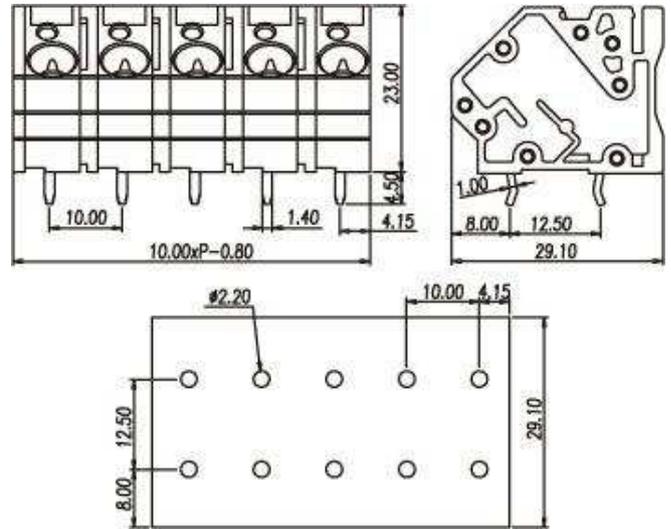

**Pitch: 10.00mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	30A / 5A	57A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	/ 0.5~6	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	26~10 / 0.5~6	
Insulation voltage (UL/IEC/Max.)	2.2 / 3 / KV	
Wire strip length	14~15mm	
End Cover		
Pole	Cat. No.	
02	WSKA750(S)-02P1	
03	WSKA750(S)-03P1	
:	:	
:	:	
:	:	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw