



Clamp Spring - Spring type terminal blocks / WSK series

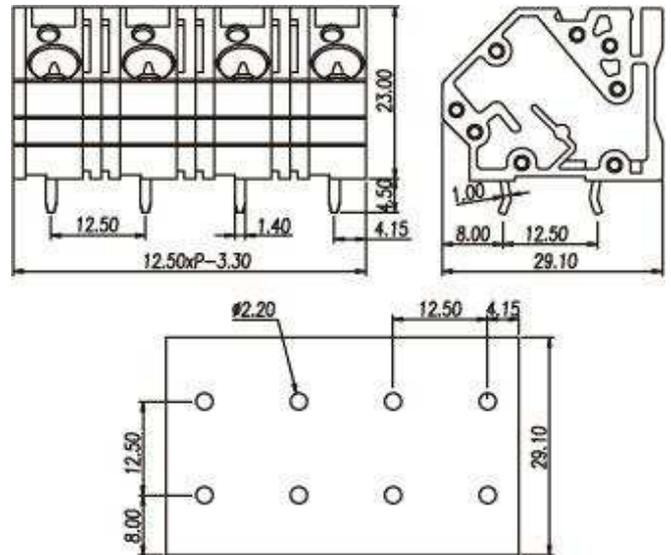

WSKA750(S)-..P2

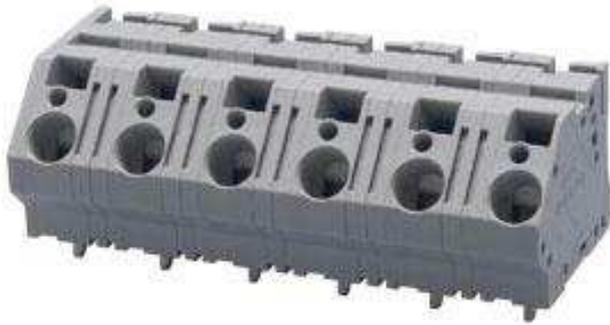

Pitch: 12.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	30A	57A
Conductor cross-section, solid (AWG/ mm ²)	/ 0.5~6	
Conductor cross-section, flexible (AWG/ mm ²)	26~10 / 0.5~6	
Insulation voltage (UL/IEC/Max.)	2.2 / 4 / KV	
Wire strip length	14~15mm	
End Cover		
Pole	Cat. No.	
02	WSKA750(S)-02P2	
03	WSKA750(S)-03P2	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw