


**Clamp Spring - Spring type terminal blocks / WK series**



**WKV254A**

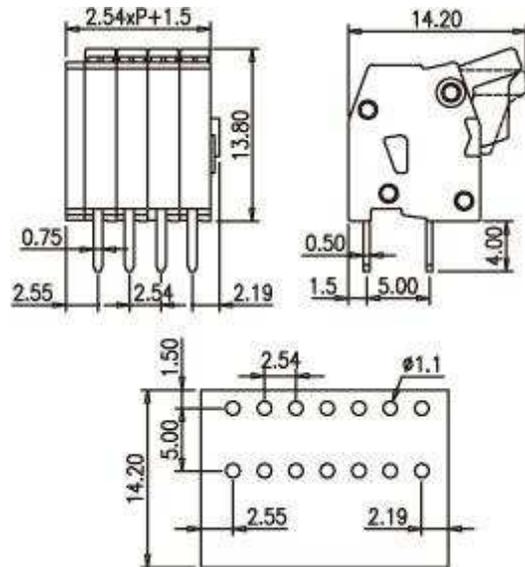

**Pitch: 2.54mm**

<b>Approval</b>		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	4A	6A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	28~20 / 0.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	0.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 2 KV	
Wire strip length	5~6mm	
<b>Single Pole</b>	<b>Cat. No.</b>	
	WKV254A-01X	
End Cover	WKV254AC	



Optional color	Cat. No.
●	WKV254A-01X
●	WKV254A-01X-GN
●	WKV254A-01X-RD
●	WKV254A-01X-BL
●	WKV254A-01X-BK
●	WKV254A-01X-OR

Pole	Cat. No.
02	WKV254A-02P
03	WKV254A-03P
04	WKV254A-04P
05	WKV254A-05P
06	WKV254A-06P
07	WKV254A-07P
08	WKV254A- 08P
09	WKV254A- 09P
10	WKV254A-10P
11	WKV254A-11P
12	WKV254A-12P
:	:
:	:

Optional color	Cat. No.
●	WKV254A-XXP
●	WKV254A-XXP-GN
●	WKV254A-XXP-RD
●	WKV254A-XXP-BL
●	WKV254A-XXP-BK
●	WKV254A-XXP-OR

**TEL:** +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** [info@dinkle.com.tw](mailto:info@dinkle.com.tw)