



Clamp Spring - Spring type terminal blocks / WK&SC series

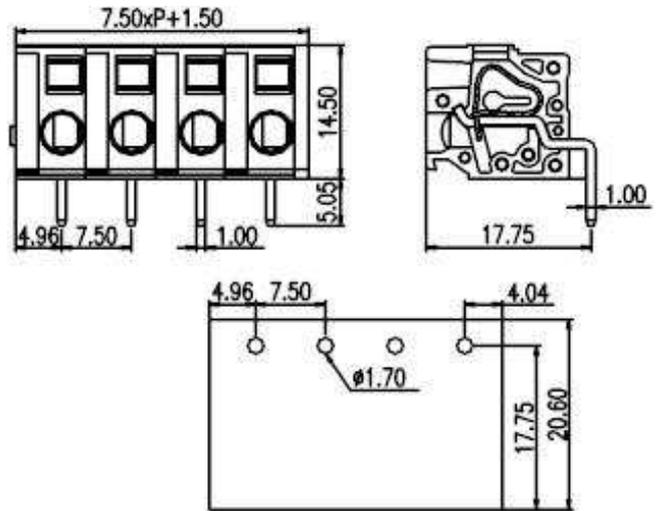

SC750R

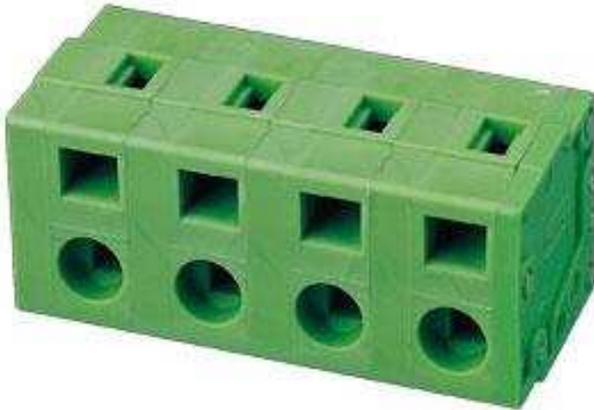

Pitch: 7.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	14A	12A
Conductor cross-section, solid (AWG/ mm ²)	28~14 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm ²)	0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	8~9mm	



Pole	Cat. No.
02	SC750R-02P
03	SC750R-03P
04	SC750R-04P
05	SC750R-05P
06	SC750R-06P
07	SC750R-07P
08	SC750R-08P
09	SC750R-09P
10	SC750R-10P
11	SC750R-11P
12	SC750R-12P
:	:
:	:

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw