


Clamp Spring - Spring type terminal blocks / WK series



WKK500

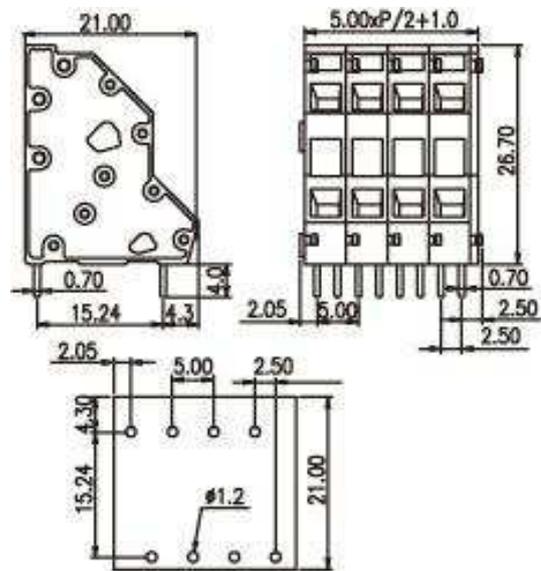

Pitch: 5.00mm

| | | |
|---|-----------------|------|
| Approval | | |
| Technical Data | UL | IEC |
| Rated voltage | 300V | 450V |
| Rated current | 10A | 24A |
| Conductor cross-section, solid (AWG/ mm ²) | 28~12 / 0.5~2.5 | |
| Conductor cross-section, flexible (AWG/ mm ²) | 28~12 / 0.5~2.5 | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 / 2.5 / 4KV | |
| Wire strip length | 6~7mm | |
| Single Pole | Cat. No. | |
| | WKK500-02X | |
| End Cover | WKK500C | |



| Optional color | Cat. No. |
|----------------|---------------|
| ● | WKK500-02X |
| ● | WKK500-02X-GN |
| ● | WKK500-02X-RD |
| ● | WKK500-02X-BL |
| ● | WKK500-02X-BK |
| ● | WKK500-02X-OR |

| Pole | Cat. No. |
|------|------------|
| 04 | WKK500-04P |
| 06 | WKK500-06P |
| 08 | WKK500-08P |
| 10 | WKK500-10P |
| 12 | WKK500-12P |
| 14 | WKK500-14P |
| 16 | WKK500-16P |
| 18 | WKK500-18P |
| 20 | WKK500-20P |
| 22 | WKK500-22P |
| 24 | WKK500-24P |
| : | : |
| : | : |

| Optional color | Cat. No. |
|----------------|---------------|
| ● | WKK500-XXP |
| ● | WKK500-XXP-GN |
| ● | WKK500-XXP-RD |
| ● | WKK500-XXP-BL |
| ● | WKK500-XXP-BK |
| ● | WKK500-XXP-OR |

TEL: +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** info@dinkle.com.tw