


Clamp Spring - Spring type terminal blocks / WK series



W3K508

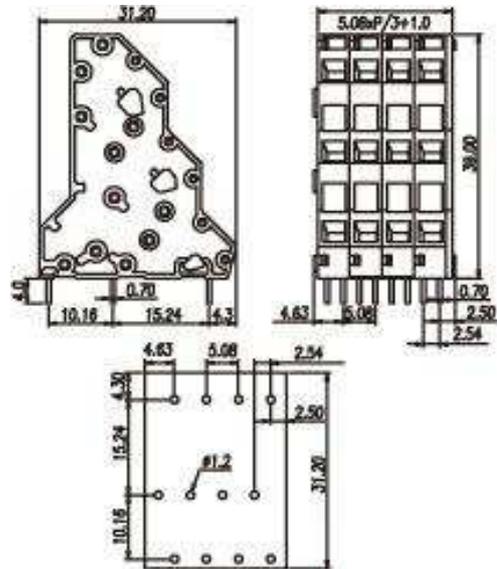

Pitch: 5.08mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Conductor cross-section, solid (AWG/ mm ²)	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm ²)	28~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	6~7mm	
Single Pole	Cat. No.	
	W3K508-03X	
End Cover	W3K500C	



Optional color	Cat. No.
●	W3K508-03X
●	W3K508-03X-GN
●	W3K508-03X-RD
●	W3K508-03X-BL
●	W3K508-03X-BK
●	W3K508-03X-OR

Pole	Cat. No.
06	W3K508-06P
09	W3K508-09P
12	W3K508-12P
15	W3K508-15P
18	W3K508-18P
21	W3K508-21P
24	W3K508-24P
27	W3K508-27P
30	W3K508-30P
33	W3K508-33P
36	W3K508-36P
:	:
:	:

Optional color	Cat. No.
●	W3K508-XXP
●	W3K508-XXP-GN
●	W3K508-XXP-RD
●	W3K508-XXP-BL
●	W3K508-XXP-BK
●	W3K508-XXP-OR

TEL: +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** info@dinkle.com.tw