


Clamp Spring - Spring type terminal blocks / WK series



W4K508

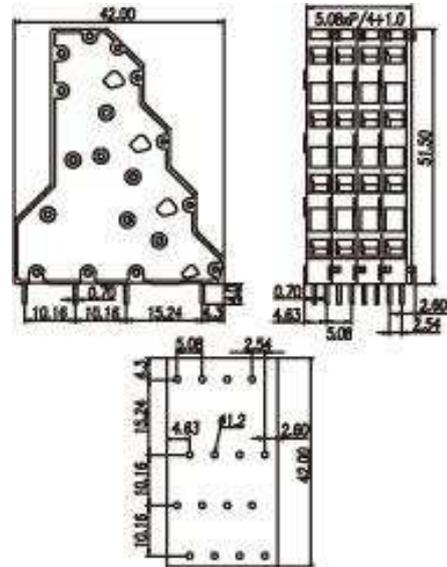

Pitch: 5.08mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	10A	24A
Conductor cross-section, solid (AWG/ mm ²)	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm ²)	28~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 3KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	W4K508-04X	
End Cover	W4K500C	



Optional color	Cat. No.
●	W4K508-04X
●	W4K508-04X-GN
●	W4K508-04X-RD
●	W4K508-04X-BL
●	W4K508-04X-BK
●	W4K508-04X-OR

Pole	Cat. No.
08	W4K508-08P
12	W4K508-12P
16	W4K508-16P
20	W4K508-20P
24	W4K508-24P
28	W4K508-28P
32	W4K508-32P
36	W4K508-36P
40	W4K508-40P
44	W4K508-44P
48	W4K508-48P
:	:
:	:

Optional color	Cat. No.
●	W4K508-XXP
●	W4K508-XXP-GN
●	W4K508-XXP-RD
●	W4K508-XXP-BL
●	W4K508-XXP-BK
●	W4K508-XXP-OR

TEL: +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** info@dinkle.com.tw