


Clamp Spring - Spring type terminal blocks / WK series



WKA750

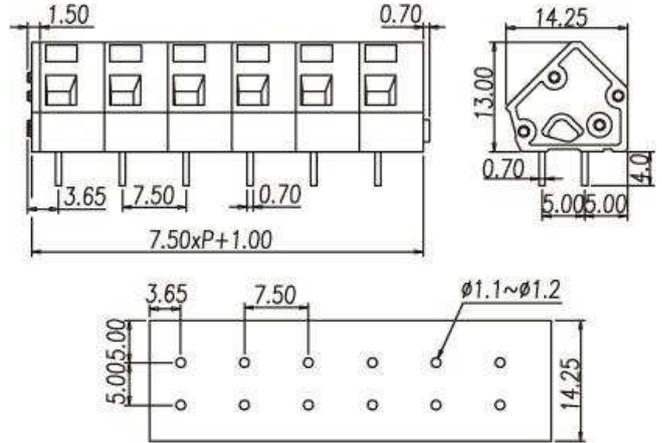

Pitch: 7.50mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Conductor cross-section, solid (AWG/ mm ²)	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm ²)	28~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 4 KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	WKA750-01X	
End Cover	WKA500C	



Optional color	Cat. No.
●	WKA750-01X
●	WKA750-01X-GN
●	WKA750-01X-RD
●	WKA750-01X-BL
●	WKA750-01X-BK
●	WKA750-01X-OR

Pole	Cat. No.
02	WKA750-02P
03	WKA750-03P
04	WKA750-04P
05	WKA750-05P
06	WKA750-06P
07	WKA750-07P
08	WKA750-08P
09	WKA750-09P
10	WKA750-10P
11	WKA750-11P
12	WKA750-12P
:	:
:	:

Optional color	Cat. No.
●	WKA750-XXP
●	WKA750-XXP-GN
●	WKA750-XXP-RD
●	WKA750-XXP-BL
●	WKA750-XXP-BK
●	WKA750-XXP-OR

TEL: +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** info@dinkle.com.tw