


Clamp Spring - Spring type terminal blocks / WK series



WKA762

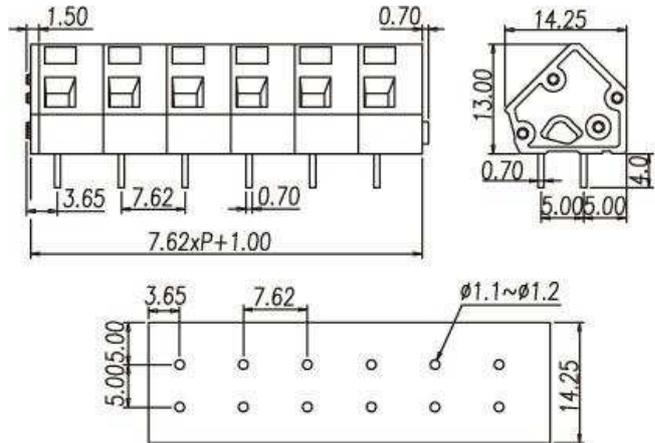

Pitch: 7.62mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Conductor cross-section, solid (AWG/ mm ²)	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm ²)	28~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 4 KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	WKA762-01X	
End Cover	WKA500C	



Optional color	Cat. No.
●	WKA762-01X
●	WKA762-01X-GN
●	WKA762-01X-RD
●	WKA762-01X-BL
●	WKA762-01X-BK
●	WKA762-01X-OR

Pole	Cat. No.
02	WKA762-02P
03	WKA762-03P
04	WKA762-04P
05	WKA762-05P
06	WKA762-06P
07	WKA762-07P
08	WKA762-08P
09	WKA762-09P
10	WKA762-10P
11	WKA762-11P
12	WKA762-12P
:	:
:	:

Optional color	Cat. No.
●	WKA762-XXP
●	WKA762-XXP-GN
●	WKA762-XXP-RD
●	WKA762-XXP-BL
●	WKA762-XXP-BK
●	WKA762-XXP-OR

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw