


**Clamp Spring - Spring type terminal blocks / WK series**



**WKA762A**

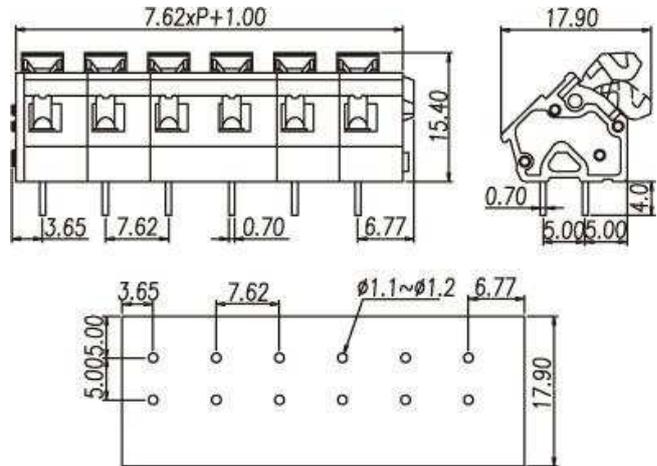

**Pitch: 7.62mm**

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	28~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	5~6mm	
<b>Single Pole</b>	<b>Cat. No.</b>	
	WKA762A-01X	
End Cover	WKA500AC	



Optional color	Cat. No.
●	WKA762A-01X
●	WKA762A-01X-GN
●	WKA762A-01X-RD
●	WKA762A-01X-BL
●	WKA762A-01X-BK
●	WKA762A-01X-OR

Pole	Cat. No.
02	WKA762A-02P
03	WKA762A-03P
04	WKA762A-04P
05	WKA762A-05P
06	WKA762A-06P
07	WKA762A-07P
08	WKA762A-08P
09	WKA762A-09P
10	WKA762A-10P
11	WKA762A-11P
12	WKA762A-12P
:	:
:	:

Optional color	Cat. No.
●	WKA762A-XXP
●	WKA762A-XXP-GN
●	WKA762A-XXP-RD
●	WKA762A-XXP-BL
●	WKA762A-XXP-BK
●	WKA762A-XXP-OR

**TEL:** +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** [info@dinkle.com.tw](mailto:info@dinkle.com.tw)