


Clamp Spring - Spring type terminal blocks / WK series



WKR750A

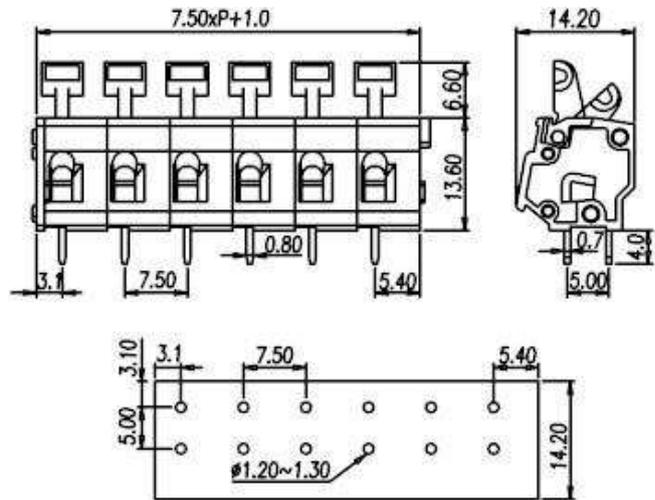

Pitch: 7.50mm

| Approval | | |
|---|------------------|------|
| Technical Data | UL | IEC |
| Rated voltage | 300V | 450V |
| Rated current | 15A | 24A |
| Conductor cross-section, solid (AWG/ mm ²) | 28~12 / 0.5~2.5 | |
| Conductor cross-section, flexible (AWG/ mm ²) | 28~12 / 0.5~2.5 | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 / 2.5 / 4 KV | |
| Wire strip length | 5~6mm | |
| Single Pole | Cat. No. | |
| | WKR750A-01X | |
| End Cover | WKR500AC | |



| Optional color | Cat. No. |
|----------------|----------------|
| ● | WKR750A-01X |
| ● | WKR750A-01X-GN |
| ● | WKR750A-01X-RD |
| ● | WKR750A-01X-BL |
| ● | WKR750A-01X-BK |
| ● | WKR750A-01X-OR |

| Pole | Cat. No. |
|------|-------------|
| 02 | WKR750A-02P |
| 03 | WKR750A-03P |
| 04 | WKR750A-04P |
| 05 | WKR750A-05P |
| 06 | WKR750A-06P |
| 07 | WKR750A-07P |
| 08 | WKR750A-08P |
| 09 | WKR750A-09P |
| 10 | WKR750A-10P |
| 11 | WKR750A-11P |
| 12 | WKR750A-12P |
| : | : |
| : | : |

| Optional color | Cat. No. |
|----------------|----------------|
| ● | WKR750A-XXP |
| ● | WKR750A-XXP-GN |
| ● | WKR750A-XXP-RD |
| ● | WKR750A-XXP-BL |
| ● | WKR750A-XXP-BK |
| ● | WKR750A-XXP-OR |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw