


**Clamp Spring - Spring type terminal blocks / WK series**



**WKA116A**

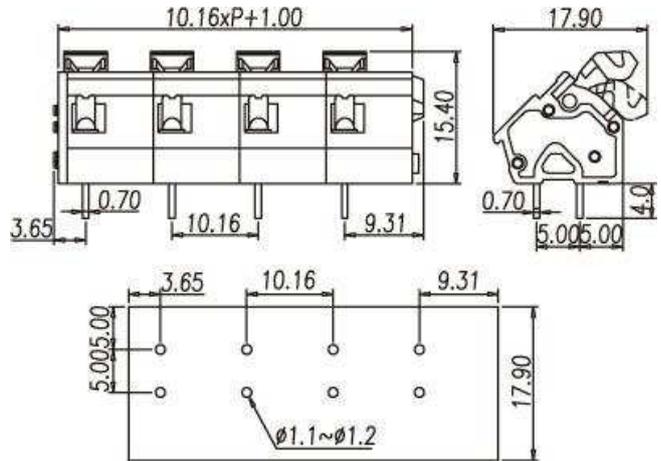

**Pitch: 10.16mm**

<b>Approval</b>	 	
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	15A / 5A	24A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	28~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / 4 KV	
Wire strip length	6~7mm	
<b>Single Pole</b>	<b>Cat. No.</b>	
	WKA116A-01X	
End Cover	WKA500AC	



Optional color	Cat. No.
●	WKA116A-01X
●	WKA116A-01X-GN
●	WKA116A-01X-RD
●	WKA116A-01X-BL
●	WKA116A-01X-BK
●	WKA116A-01X-OR

Pole	Cat. No.
02	WKA116A-02P
03	WKA116A-03P
04	WKA116A-04P
05	WKA116A-05P
06	WKA116A-06P
07	WKA116A-07P
08	WKA116A-08P
09	WKA116A-09P
10	WKA116A-10P
11	WKA116A-11P
12	WKA116A-12P
:	:
:	:

Optional color	Cat. No.
●	WKA116A-XXP
●	WKA116A-XXP-GN
●	WKA116A-XXP-RD
●	WKA116A-XXP-BL
●	WKA116A-XXP-BK
●	WKA116A-XXP-OR

**TEL:** +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** [info@dinkle.com.tw](mailto:info@dinkle.com.tw)