


**Clamp Spring - Spring type terminal blocks / WK series**



**WKV116A**

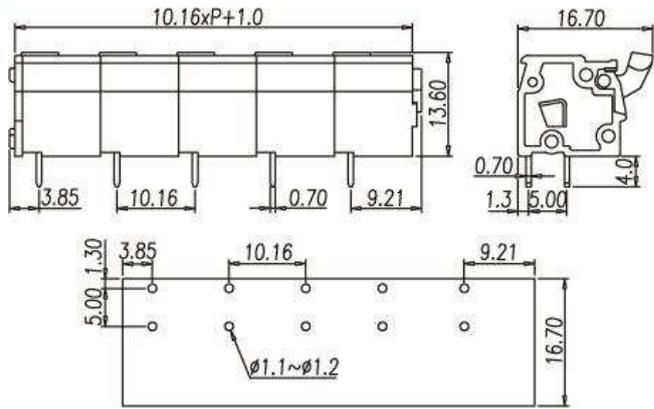

**Pitch: 10.16mm**

<b>Approval</b>	 	
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	15A / 5A	24A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	28~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / 4 KV	
Wire strip length	6~7mm	
<b>Single Pole</b>	<b>Cat. No.</b>	
	WKV116A-01X	
End Cover	WKV500AC	



Optional color	Cat. No.
●	WKV116A-01X
●	WKV116A-01X-GN
●	WKV116A-01X-RD
●	WKV116A-01X-BL
●	WKV116A-01X-BK
●	WKV116A-01X-OR

Pole	Cat. No.
02	WKV116A-02P
03	WKV116A-03P
04	WKV116A-04P
05	WKV116A-05P
06	WKV116A-06P
07	WKV116A-07P
08	WKV116A-08P
09	WKV116A-09P
10	WKV116A-10P
11	WKV116A-11P
12	WKV116A-12P
:	:
:	:

Optional color	Cat. No.
●	WKV116A-XXP
●	WKV116A-XXP-GN
●	WKV116A-XXP-RD
●	WKV116A-XXP-BL
●	WKV116A-XXP-BK
●	WKV116A-XXP-OR

**TEL:** +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** [info@dinkle.com.tw](mailto:info@dinkle.com.tw)