



**Clamp Spring - Spring type terminal blocks / WK&SC series**

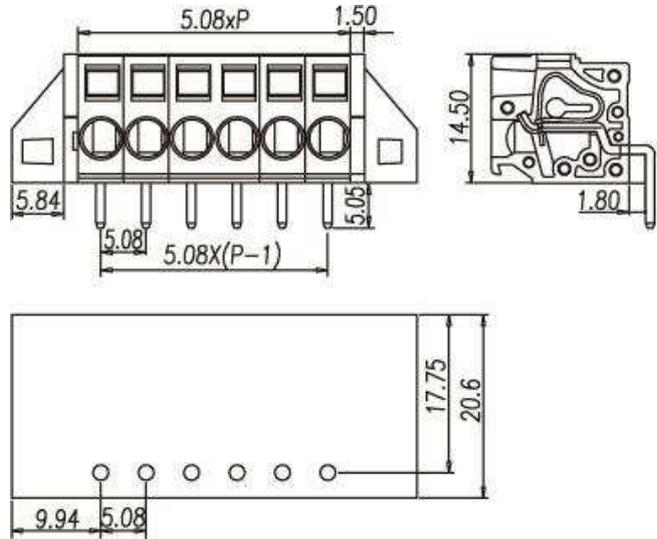

**SC508RM**

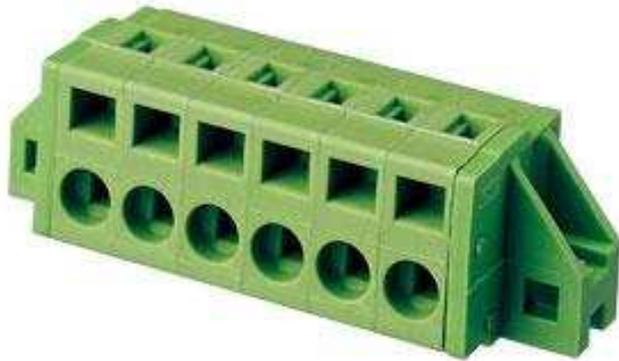

**Pitch: 5.08mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	14A	12A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	28~14 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	8~9mm	



Pole	Cat. No.
02	SC508RM-02P
03	SC508RM-03P
04	SC508RM-04P
05	SC508RM-05P
06	SC508RM-06P
07	SC508RM-07P
08	SC508RM-08P
09	SC508RM-09P
10	SC508RM-10P
11	SC508RM-11P
12	SC508RM-12P
:	:
:	:

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: [info@dinkle.com.tw](mailto:info@dinkle.com.tw)