


Mini type, simple type cage clamp terminal blocks / 244 series



244RA

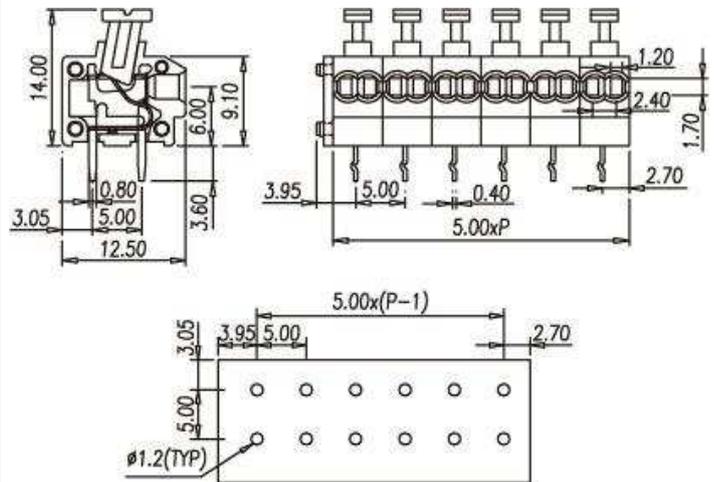

Pitch: 5.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	10A	12A
Conductor cross-section, solid (AWG/ mm ²)	24~18 / 0.5~0.75	
Conductor cross-section, flexible (AWG/ mm ²)	24~18 / 0.5~0.75	
Rated surge voltage (UL/IEC/Max.)	1.6 / 3 / 3 KV	
Torque (N-m)		
Wire strip length	9~10mm	
End Cover	0056A4XX00	
Pole	Cat. No.	
02	244RA-02P	
:	:	
:	:	
24	244RA-24P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw