


Mini type, simple type cage clamp terminal blocks / 144 series



144RA-..P3

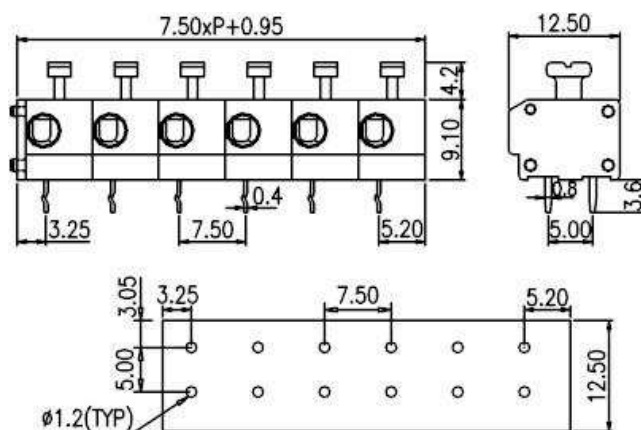

Pitch: 7.50mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	750V
Rated current	10A	24A
Conductor cross-section, solid (AWG/ mm ²)	20~14 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm ²)	20~14 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Torque (N-m)		
Wire strip length	6~7mm	
End Cover	144E	
Pole	Cat. No.	
02	144RA-02P3	
:	:	
:	:	
24	144RA-24P3	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw