


Mini type, simple type cage clamp terminal blocks / 144 series



**144R-..P3**

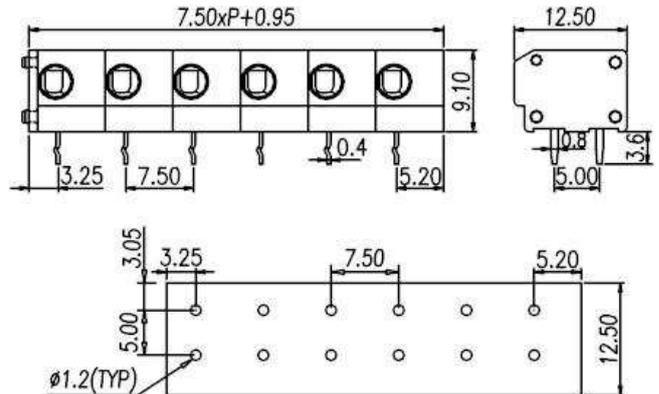

**Pitch: 7.50mm**

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	10A	24A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	20~14 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	20~14 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Torque (N-m)		
Wire strip length	6~7mm	
End Cover	144E	
<b>Pole</b>	<b>Cat. No.</b>	
02	144R-02P3	
:	:	
:	:	
24	144R-24P3	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw