


Mini type, simple type cage clamp terminal blocks / 144 series



144R-..P2

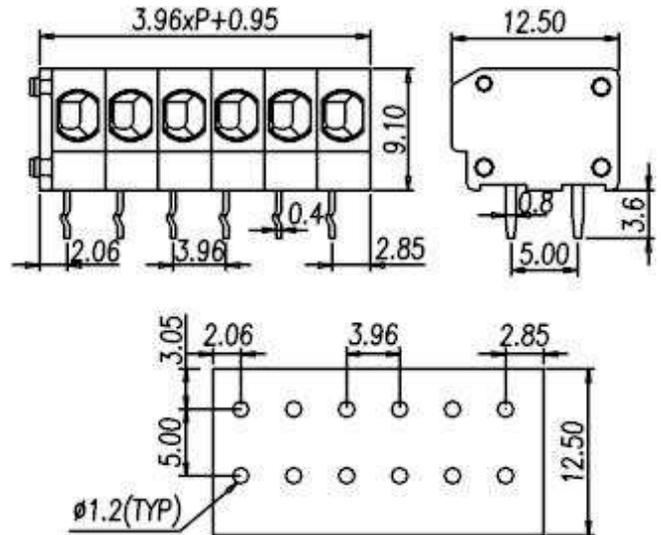

Pitch: 3.96mm

| Approval |   | |
|---|--|-------|
| Technical Data | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 10A | 17.5A |
| Conductor cross-section, solid (AWG/ mm ²) | 20~14 / 0.5~1.5 | |
| Conductor cross-section, flexible (AWG/ mm ²) | 20~14 / 0.5~1.5 | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 / 2 / 3 KV | |
| Torque (N-m) | | |
| Wire strip length | 6~7mm | |
| End Cover | 144E | |
| Pole | Cat. No. | |
| 02 | 144R-02P2 | |
| : | : | |
| : | : | |
| 24 | 144R-24P2 | |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw