


Mini type, simple type cage clamp terminal blocks / 141 series



141R-..P5

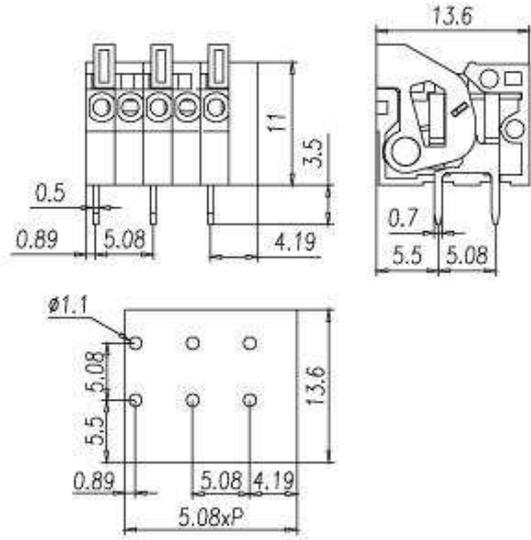

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	5A	4A
Conductor cross-section, solid (AWG/ mm ²)	26~20 / 0.5	
Conductor cross-section, flexible (AWG/ mm ²)	26~20 / 0.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 2 KV	
Torque (N-m)		
Screw		
Wire strip length	10~11mm	
Pole	Cat. No.	
02	141R-02P5	
:	:	
:	:	
24	141R-24P5	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw