


Mini type, simple type cage clamp terminal blocks / 0138 series



**0138-50XXL1.5**

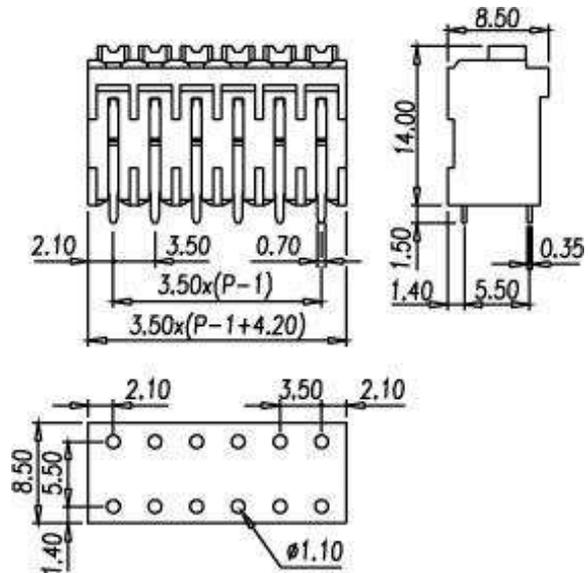

**Pitch: 3.50mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	
Rated current	10A	
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	28~16 / 1.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	28~16 / 1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 // KV	
Torque (N-m)		
Screw		
Wire strip length	9mm	
Pole	Cat. No.	
02	0138-5002L1.5	
03	0138-5003L1.5	
:	:	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw