


Mini type, simple type cage clamp terminal blocks / 0136 series



0136-10

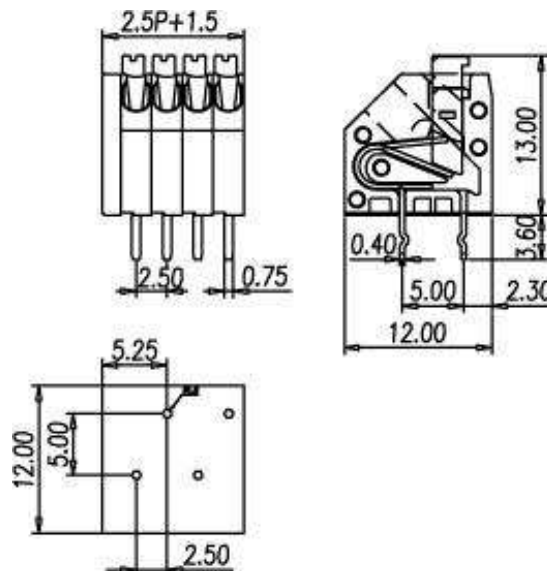

Pitch: 2.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	2A	2A
Conductor cross-section, solid (AWG/ mm ²)	28~20 / 0.5	
Conductor cross-section, flexible (AWG/ mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.6 / / KV	
Torque (N-m)		
Screw		
Wire strip length	8mm	
Pole	Cat. No.	
02	0136-1002	
03	0136-1003	
:	:	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw