




Spring Type DIN Rail Terminal Blocks / AK series



AK6

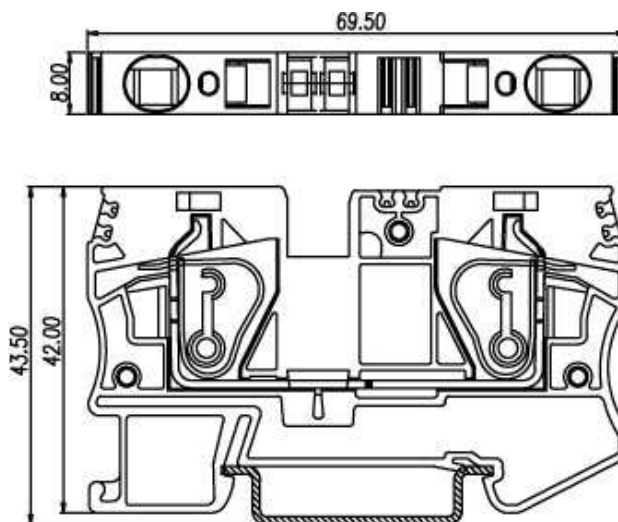

Approval		
Technical Data	UL	IEC
Rated voltage	600V	800V
Rated current	35A	41A
Conductor cross-section, solid (AWG / mm ²)	24~8 / 0.5~6	
Conductor cross-section, flexible (AWG / mm ²)	24~8 / 0.5~6	
Rated impulse withstand voltage	6KV	
Torque (N-m)		
Screw		
Wire strip length	12mm	
Insulating material	PA	
TxHxW (mm)	8 x 42 x 69.5	
Optional color	Cat. No.	
	AK6-BL	



	Accessories	Cat. No.
End cover		AK6C
Partition		AKSPS-002
Small partition		
Insertion bridge	2 way	DSD01-602
	3 way	DSD01-603
	4 way	DSD01-604
	5 way	DSD01-605
	10 way	DSD01-610
Insertion bridge		
Screw-on bridge		
Marking label		TM22 / TM38
Mounting Rail		TS-35
Tool		0.8 x 4mm