


## Spring Type DIN Rail Terminal Blocks / AK series



### AK16-TN

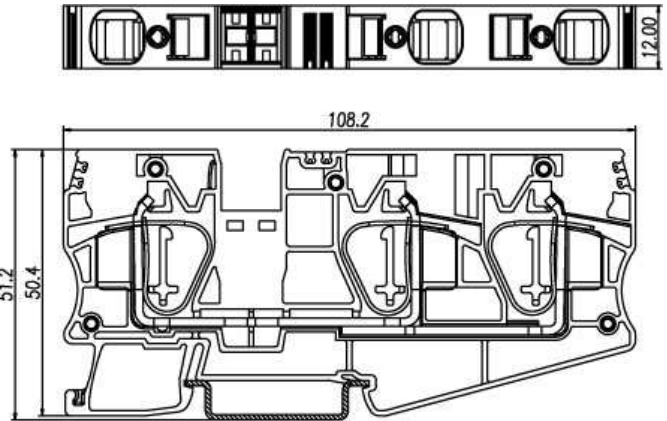

Approval	Pending	
<b>Technical Data</b>	UL	IEC
Rated voltage	600V	800V
Rated current	51A	76A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	24~4 / 0.5~16	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	24~4 / 0.5~16	
Rated impulse withstand voltage	6KV	
Torque (N-m)		
Screw		
Wire strip length	18mm	
Insulating material	PA	
TxHxW (mm)	12 x 50.4 x 108.2	
Optional color	Cat. No.	
●		
●	AK16-TN-BL	
●		
●		



	Accessories	Cat. No.
End cover		AK16C-TN
Partition		
Small partition		
Insertion bridge	2 way	DSD01-1602
Insertion bridge		
Screw-on bridge		
Marking label		TM22 / TM38
Mounting Rail		TS-35
Tool		1.0 x 5.5mm