


# Spring Type DIN Rail Terminal Blocks / AK series



## AKK2.5

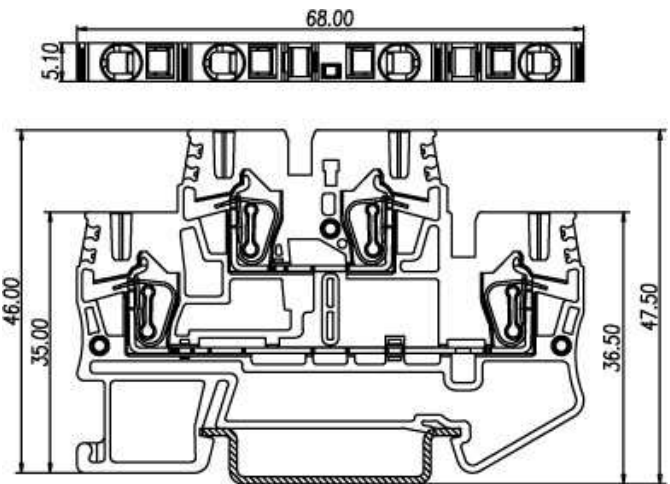

| Approval                                                   | Pending         |      |
|------------------------------------------------------------|-----------------|------|
| Technical Data                                             | UL              | IEC  |
| Rated voltage                                              | 600V            | 800V |
| Rated current                                              | 20A             | 24A  |
| Conductor cross-section, solid (AWG / mm <sup>2</sup> )    | 30~12 / 0.5~2.5 |      |
| Conductor cross-section, flexible (AWG / mm <sup>2</sup> ) | 30~12 / 0.5~2.5 |      |
| Rated impulse withstand voltage                            | 6KV             |      |
| Torque (N-m)                                               |                 |      |
| Screw                                                      |                 |      |
| Wire strip length                                          | 10mm            |      |
| Insulating material                                        | PA              |      |
| TxHxW (mm)                                                 | 5.1 x 46 x 68   |      |
| Optional color                                             | Cat. No.        |      |
| ●                                                          |                 |      |
| ●                                                          | AKK2.5-BL       |      |
| ●                                                          |                 |      |
| ●                                                          |                 |      |



|                  | Accessories | Cat. No.    |
|------------------|-------------|-------------|
| End cover        |             | AKK2.5C     |
| Partition        |             |             |
| Small partition  |             |             |
| Insertion bridge | 2 way       | DSD01-2.502 |
|                  | 3 way       | DSD01-2.503 |
|                  | 4 way       | DSD01-2.504 |
|                  | 5 way       | DSD01-2.505 |
|                  | 10 way      | DSD01-2.510 |
|                  | 20 way      | DSD01-2.520 |
| Insertion bridge |             |             |
| Screw-on bridge  |             |             |
| Marking label    |             | TM20 / TM36 |
| Mounting Rail    |             | TS-35       |
| Tool             |             | 0.6 x 3.5mm |
|                  |             |             |
|                  |             |             |
|                  |             |             |
|                  |             |             |