


Spring Type DIN Rail Terminal Blocks / Diodes



AKK2.5-D/A-BL/BR-L

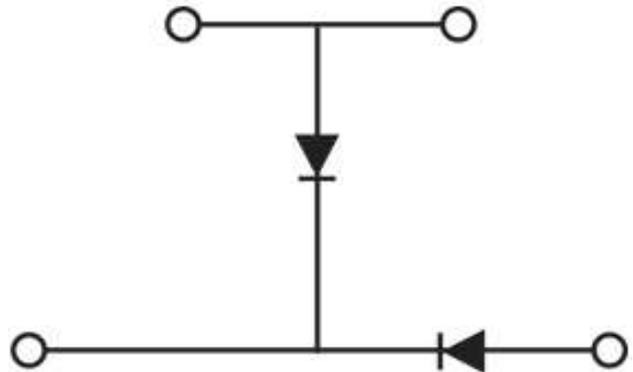

Approval	Pending	
Technical Data	UL	IEC
Rated voltage	600V	800V
Nominal voltage(Wago)		
Rated current		
Current intensity(Wago)		
Reverse voltage(Wago)		
Conductor cross-section, solid (AWG / mm ²)	28~12 / 0.2~2.5	
Conductor cross-section, flexible (AWG / mm ²)	28~12 / 0.2~2.5	
Rated impulse withstand voltage	6KV	
Torque (N-m)		
Screw		
Wire strip length	10mm	
Insulating material	PA	
TxHxW (mm)	5.1 x 46 x 68	



	Accessories	Cat. No.
End cover		AKK2.5C
Insertion bridge		DSD01-2.5XX
Marking label		TM20/TM36
Mounting Rail		TS-35
Tool		0.6 x 3.5mm