



DIN Rail terminal blocks / DK..-PE series

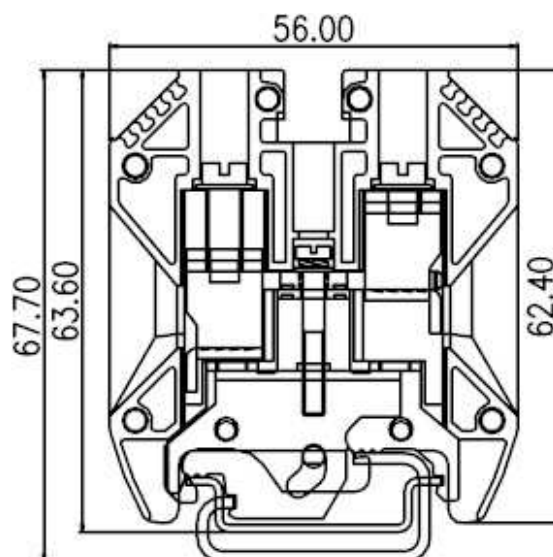

DK16-PE

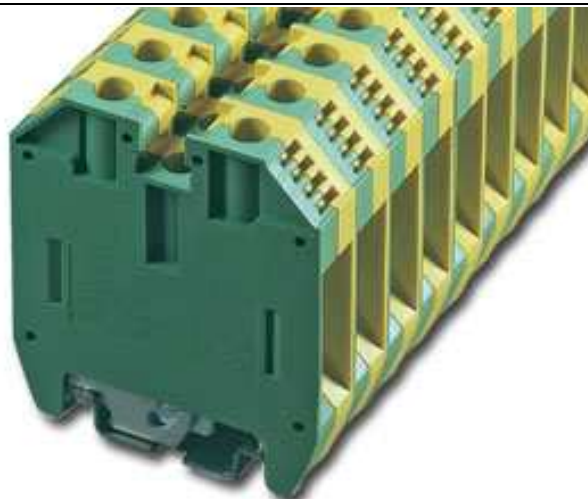

Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current		76A
Conductor cross-section, solid (AWG / mm ²)	14~6 / 2.5~16	
Conductor cross-section, flexible (AWG / mm ²)	14~6 / 2.5~16	
Rated impulse withstand voltage	8KV	
Torque (N-m)	3.4	
Screw	M5	
Wire strip length	14~18mm	
Insulating material	PA	
TxHxW (mm)	12 x 62.4 x 56	
Optional color	Cat. No.	
		
		
		
		



	Accessories	Cat. No.
End cover		
Partition		
Small partition		
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		1.0 x 5.5mm