



DIN Rail terminal blocks / DK..-PE series

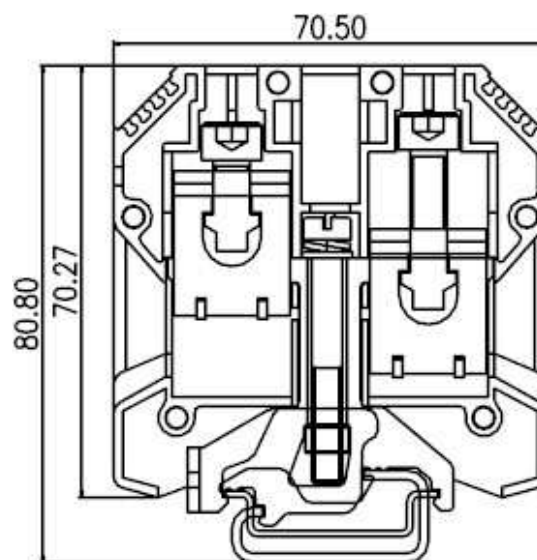

DK50-PE

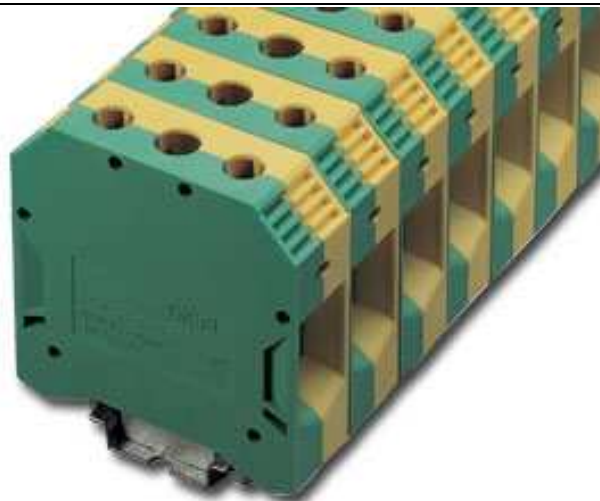

Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current		150A
Conductor cross-section, solid (AWG / mm ²)	6~1/0 / 16~50	
Conductor cross-section, flexible (AWG / mm ²)	6~1/0 / 16~50	
Rated impulse withstand voltage	8KV	
Torque (N-m)	7.9	
Screw	M6	
Wire strip length	20~25mm	
Insulating material	PA	
TxHxW (mm)	20 x 70.27 x 70.5	
Optional color	Cat. No.	
●		
●		
●		
●		



	Accessories	Cat. No.
End cover		
Partition		
Small partition		
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		