



DIN Rail terminal blocks / DK..-TR series

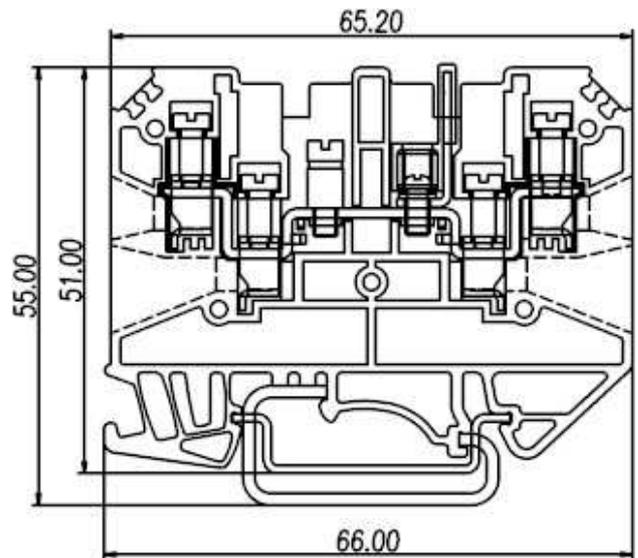

DK4-TR

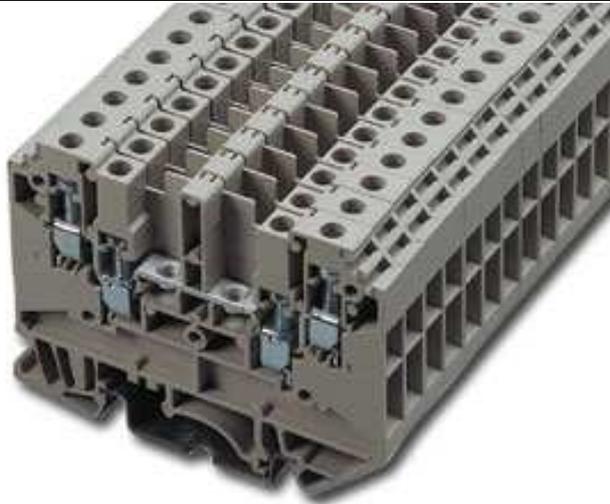

Approval		
Technical Data	UL	IEC
Rated voltage	300V	660V
Rated current	16A	32A
Conductor cross-section, solid (AWG / mm ²)	22~12 / 0.5~4	
Conductor cross-section, flexible (AWG / mm ²)	22~12 / 0.5~4	
Rated impulse withstand voltage	8KV	
Torque (N-m)	0.7	
Screw	M3	
Wire strip length	6~7mm	
Insulating material	PA	
TxHxW (mm)	6.1 x 51 x 65.2	
Optional color	Cat. No.	
●	DK4-TR-RD	
●	DK4-TR-BL	
●	DK4-TR-BK	
●	DK4-TR-OR	



	Accessories	Cat. No.
End cover		DK4C-TR
Partition		
Small partition		DKSPS-007
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-402
	3 way	CSC-403
	4 way	CSC-404
	10 way	CSC-410
Screw-on bridge	2 way	DS4-02P
	3 way	DS4-03P
	4 way	DS4-04P
	10 way	DS4-10P
Marking label		TM21
Mounting Rail		TS-35 / TS-32
Tool		0.5 x 3mm