



DIN Rail terminal blocks / DK..-TR-TG series

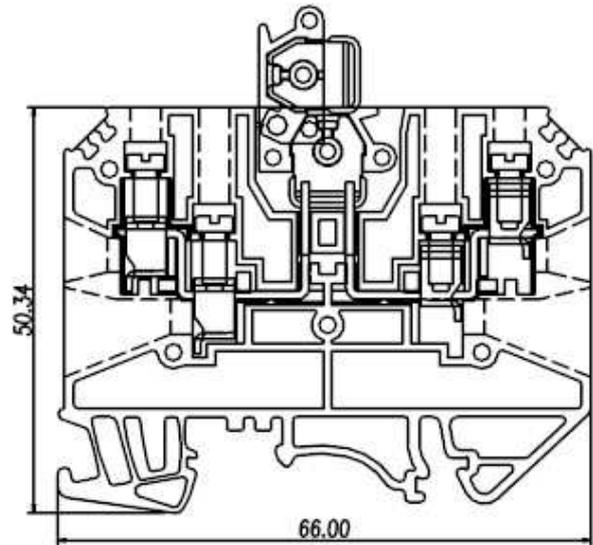

DK4-TR-TG

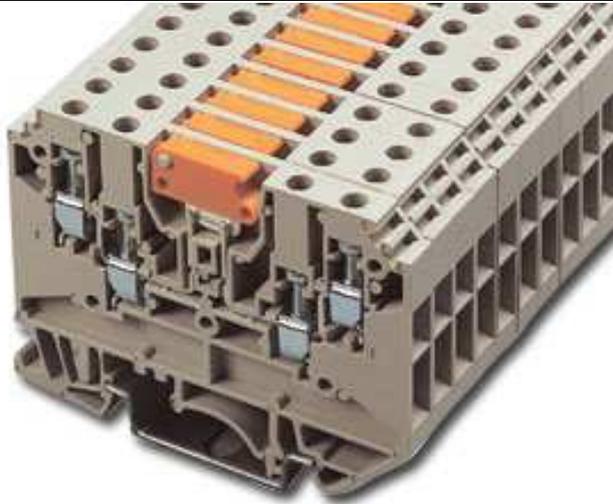

| Approval | | |
|--|-----------------|------|
| Technical Data | UL | IEC |
| Rated voltage | 600V | 800V |
| Rated current | 10A | 32A |
| Conductor cross-section, solid (AWG / mm ²) | 22~10 / 0.5~4 | |
| Conductor cross-section, flexible (AWG / mm ²) | 22~10 / 0.5~4 | |
| Rated impulse withstand voltage | 6KV | |
| Torque (N-m) | 0.8 | |
| Screw | M3 | |
| Wire strip length | 9~10mm | |
| Insulating material | PA | |
| TxHxW (mm) | 6.1 x 50.3 x 66 | |
| Optional color | Cat. No. | |
| ● | | |
| ● | | |
| ● | | |
| ● | | |



| | Accessories | Cat. No. |
|------------------|-------------|---------------|
| End cover | | DK4C-TR-TG |
| Partition | | |
| Small partition | | |
| Insertion bridge | 2 way | |
| | 3 way | |
| | 4 way | |
| | 10 way | |
| Insertion bridge | 2 way | CSC-402 |
| | 3 way | CSC-403 |
| | 4 way | CSC-404 |
| | 10 way | CSC-410 |
| Screw-on bridge | 2 way | |
| | 3 way | |
| | 4 way | |
| | 10 way | |
| Marking label | | TM21 |
| Mounting Rail | | TS-35 / TS-32 |
| Tool | | 0.5 x 3mm |
| | | |
| | | |
| | | |
| | | |