


DIN Rail terminal blocks / DK..-TF series



DKK4-TF(5x20)

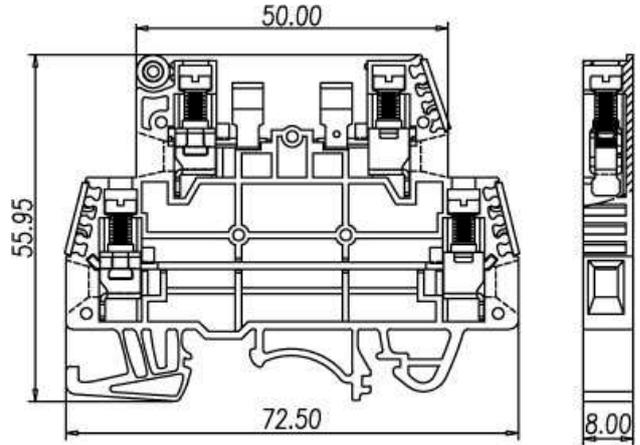

Approval		
Technical Data	UL	IEC
Rated voltage	300V	300V
Rated current	16A ¹⁾ 30A ²⁾	16A ¹⁾ 30A ²⁾
Conductor cross-section, solid (AWG / mm ²)	22~12 / 0.5~4	
Conductor cross-section, flexible (AWG / mm ²)	22~12 / 0.5~4	
Rated impulse withstand voltage	6KV	
Torque (N-m)	0.67	
Screw	M3.5	
Wire strip length	10~12mm	
Insulating material	PA	
TxHxW (mm)	8 x 60.5 x 72.5	
	1) upper level	
	2) lower level	
	UL 600V / 5A	



	Accessories	Cat. No.
End cover		DKK4C-TF
Partition		
Small partition		
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-602N
	3 way	CSC-603N
	4 way	CSC-604N
	10 way	CSC-610N
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		0.5 x 3mm
	Nom Voltage	Cat No.