


DIN Rail terminal blocks / DKZ series



DKZ35

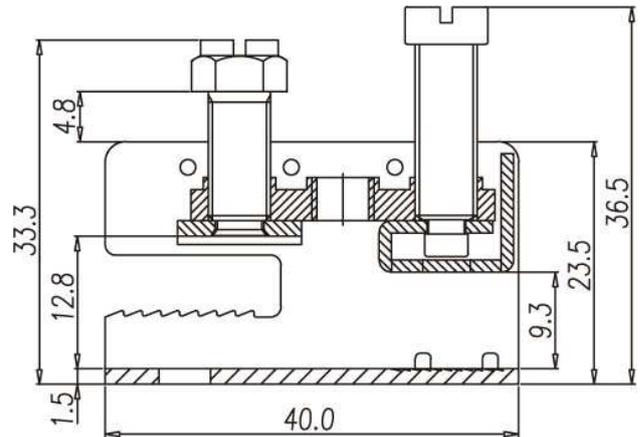

Approval		
Technical Data	UL	IEC
Rated voltage		
Rated current	115A	125A
Conductor cross-section, solid (AWG / mm ²)	18~2 / 0.75~35	
Conductor cross-section, flexible (AWG / mm ²)	18~2 / 0.75~35	
Rated impulse withstand voltage		
Torque (N-m)	3	
Screw	M6	
Wire strip length	12~13mm	
Insulating material		
TxHxW (mm)	12 x 36.5 x 40	
Accessories	Cat. No.	
Busbar	C000009500	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw