



## DIN Rail terminal blocks / DK..D series

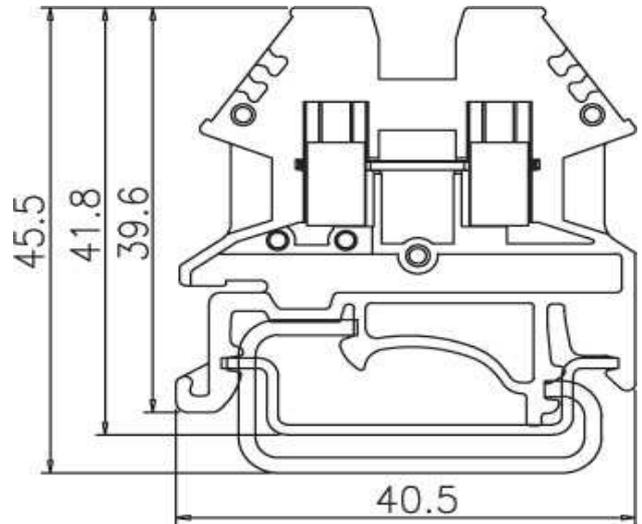

### DK2.5D

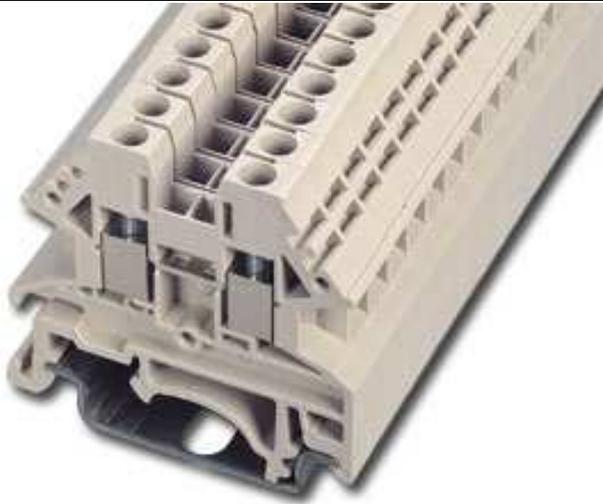

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	20A	24A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	22~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	22~12 / 0.5~2.5	
Rated impulse withstand voltage	6KV	
Torque (N-m)	0.5	
Screw	M2.5	
Wire strip length	9~11mm	
Insulating material	PA	
TxHxW (mm)	5.1x39.6x40.5	
Optional color	Cat. No.	
●	DK2.5D-RD	
●	DK2.5D-BL	
●	DK2.5D-BK	
●	DK2.5D-OR	



	Accessories	Cat. No.
End cover		DK4NC
Partition		
Small partition		DKNSPS-001
Insertion bridge	2 way	DSS2.5N-02P
	3 way	DSS2.5N-03P
	4 way	DSS2.5N-04P
	10 way	DSS2.5N-10P
Insertion bridge	2 way	CSC-2.502N
	3 way	CSC-2.503N
	4 way	CSC-2.504N
	10 way	CSC-2.510N
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM26
Mounting Rail		TS-35 / TS-32
Tool		0.4x2.5mm