



DIN Rail terminal blocks / DK..D series

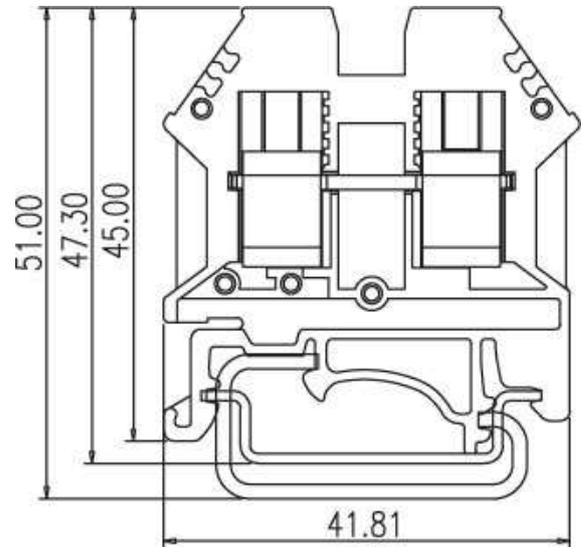

DK6D

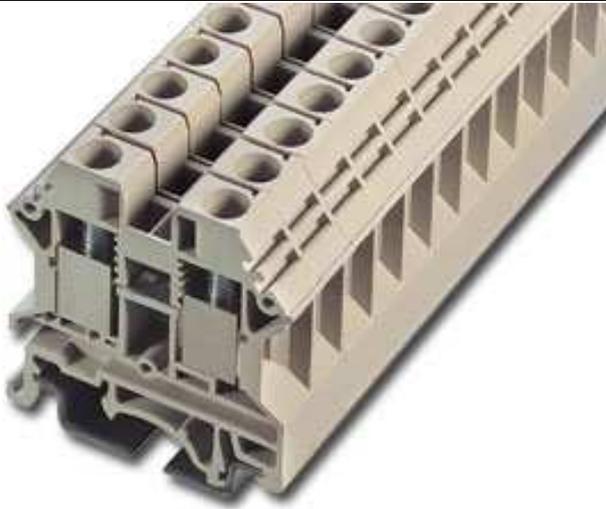

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	50A	41A
Conductor cross-section, solid (AWG / mm ²)	20~8 / 0.5~6	
Conductor cross-section, flexible (AWG / mm ²)	20~8 / 0.5~6	
Rated impulse withstand voltage	8KV	
Torque (N-m)	1.2	
Screw	M4	
Wire strip length	12~14mm	
Insulating material	PA	
TxHxW (mm)	8x45x41.8	
Optional color	Cat. No.	
●	DK6D-RD	
●	DK6D-BL	
●	DK6D-BK	
●	DK6D-OR	



	Accessories	Cat. No.
End cover		DK6NC
Partition		
Small partition		DKNSPS-002
Insertion bridge	2 way	DSS6N-02P
	3 way	DSS6N-03P
	4 way	DSS6N-04P
	10 way	DSS6N-10P
Insertion bridge	2 way	CSC-602N
	3 way	CSC-603N
	4 way	CSC-604N
	10 way	CSC-610N
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		0.8x4mm