


DIN Rail terminal blocks / DK..P series



DK4P

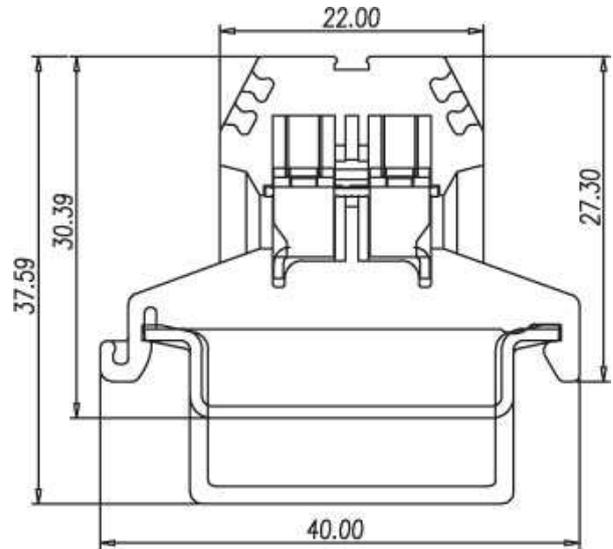

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	500V
Rated current	30A	32A
Conductor cross-section, solid (AWG / mm ²)	22~10 / 0.5~4	
Conductor cross-section, flexible (AWG / mm ²)	22~10 / 0.5~4	
Rated impulse withstand voltage	5KV	
Torque (N-m)	5.2	
Screw	M3	
Wire strip length	7~9mm	
Insulating material	PA	
TxHxW (mm)	6.1x27.3x40	
Optional color	Cat. No.	
	DK4P-RD	
	DK4P-BL	
	DK4P-BK	
	DK4P-OR	



	Accessories	Cat. No.
End cover		DK4PC
Partition		
Small partition		
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-402S
	3 way	CSC-403S
	4 way	CSC-404S
	10 way	CSC-410S
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM21
Mounting Rail		TS-35
Tool		