



DIN Rail terminal blocks / DK..S series

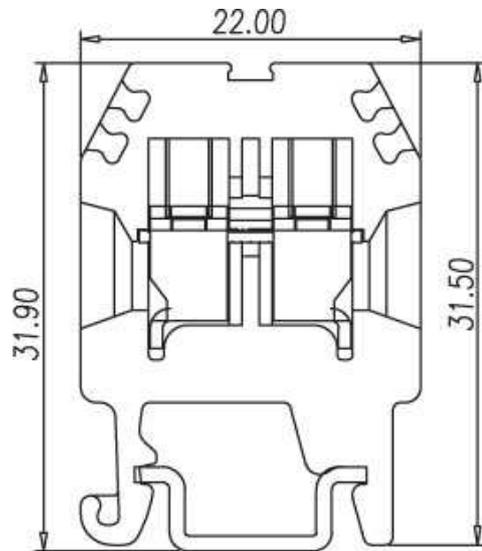

DK4S

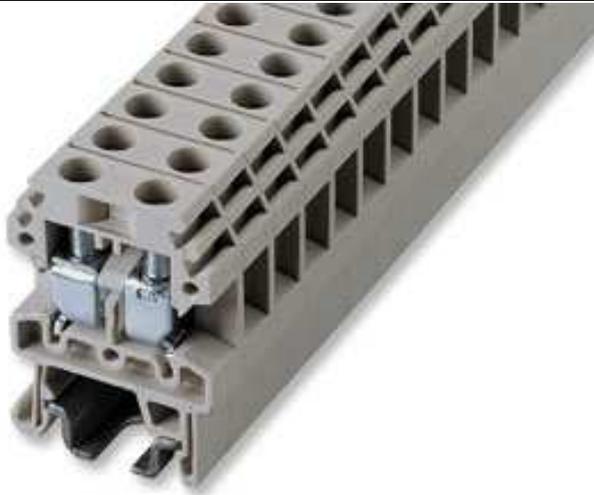

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	500V
Rated current	30A	32A
Conductor cross-section, solid (AWG / mm ²)	22~10 / 0.5~4	
Conductor cross-section, flexible (AWG / mm ²)	22~10 / 0.5~4	
Rated impulse withstand voltage	5KV	
Torque (N-m)	0.6	
Screw	M3	
Wire strip length	7~9mm	
Insulating material	PA	
TxHxW (mm)	6.1x31.5x22	
Optional color	Cat. No.	
●	DK4S-RD	
●	DK4S-BL	
●	DK4S-BK	
●	DK4S-OR	



	Accessories	Cat. No.
End cover		DK4PC
Partition		
Small partition		
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-402S
	3 way	CSC-403S
	4 way	CSC-404S
	10 way	CSC-410S
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM21
Mounting Rail		TS-15
Tool		