



## DIN Rail terminal blocks / DK..S series

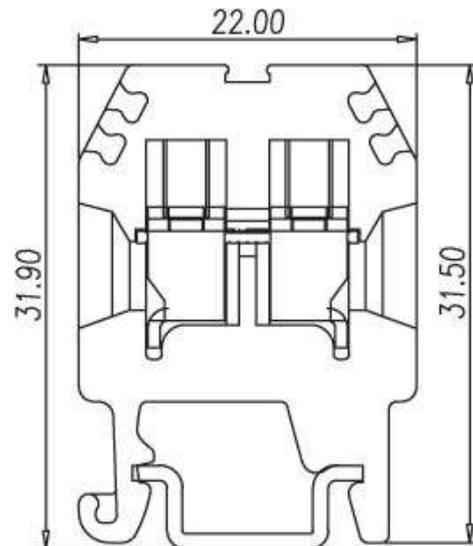

### DK6S

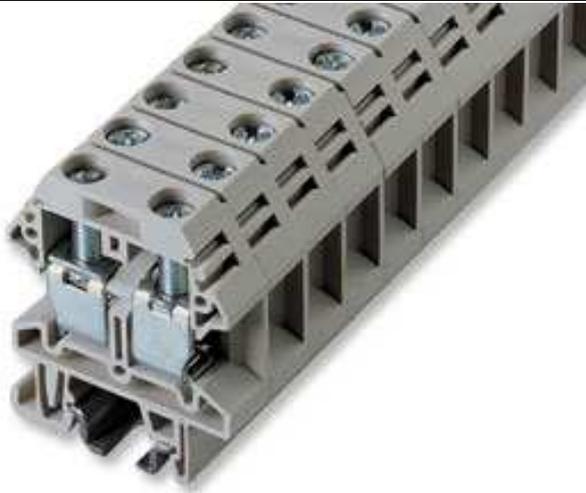

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	500V
Rated current	50A	41A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	20~8 / 0.5~6	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	20~8 / 0.5~6	
Rated impulse withstand voltage	6KV	
Torque (N-m)	1.2	
Screw	M4	
Wire strip length	9~11mm	
Insulating material	PA	
TxHxW (mm)	8x37.4x30	
Optional color	Cat. No.	
	DK6S-RD	
	DK6S-BL	
	DK6S-BK	
	DK6S-OR	



	Accessories	Cat. No.
End cover		DK6PC
Partition		
Small partition		
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-602S
	3 way	CSC-603S
	4 way	CSC-604S
	10 way	CSC-610S
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM22
Mounting Rail		TS-15
Tool		