


DIN Rail terminal blocks / TKE series



TKE02

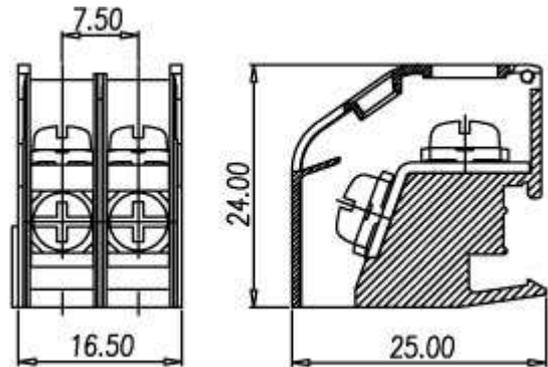

Approval		
Technical Data	UL	IEC
Rated voltage	600V	800V
Rated current	15A	17.5A
Conductor cross-section, solid (AWG / mm ²)	20~16 / 0.5~1.5	
Conductor cross-section, flexible (AWG / mm ²)	20~16 / 0.5~1.5	
Rated impulse withstand voltage	5KV	
Torque (N-m)	0.8	
Screw	M3	
Wire strip length	9~10mm	
Insulating material	PA	
TxHxW (mm)	16.5 x 24 x 25	
Optional color	Cat. No.	
	TKE02-OR	
	TKE02-YG	



	Accessories	Cat. No.
Marking label		TM01
Mounting Rail		TKE-R-1000
Tool		



TKE-R