


DIN Rail terminal blocks / DKT series



DKTL6A

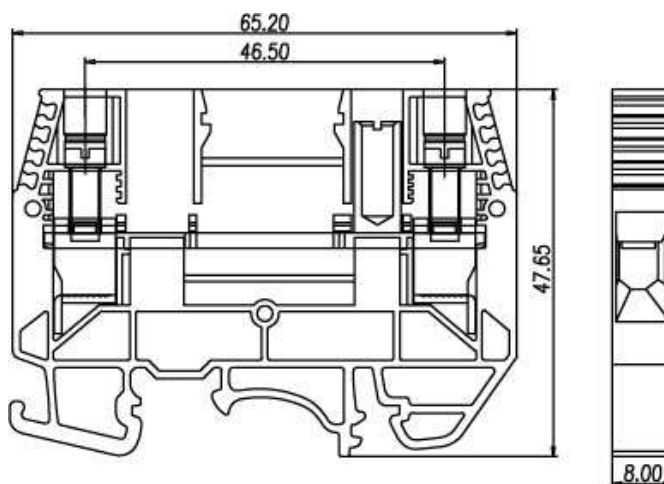

Approval	UL	
Technical Data	UL	IEC
Rated voltage	300V / 600V	660V
Rated current	48A / 5A	41A
Conductor cross-section, solid (AWG / mm ²)	20~8 / 0.5~6	
Conductor cross-section, flexible (AWG / mm ²)	20~8 / 0.5~6	
Rated impulse withstand voltage	6KV	
Torque (N-m)	2	
Screw	M4	
Wire strip length	8mm	
Insulating material	PA	
TxHxW (mm)	8 x 65.6 x 47.5	



	Accessories	Cat. No.
End cover		DKTLC
Partition		DKSPS-006
Small partition		DKTLP
Jumper slide	2 way	DS6A02
	3 way	DS6A01
Test Plug		C002-0101-BK
		C002-0101-RD
Screw		DS6S1-BK
		DS6S1-OR
		DS6S1-YW
		DS6S1-RD
Screw		DS6S2-BK
		DS6S2-OR
		DS6S2-YW
		DS6S2-RD
Screw		DS6S3-BK
		DS6S3-OR
		DS6S3-YW
		DS6S3-RD
Connection sleeve		C002-0201
Connection socket		C002-0301
Insertion bridge	2 way	CSC-602
	3 way	CSC-603
	5 way	CSC-605
Screw-on bridge	2 way	DS6-02
	3 way	DS6-03
	5 way	DS6-05
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		0.6 x 3.5mm