


Headers(Sockets) for pluggable terminal blocks / ECH & EHD series



ECHB250R

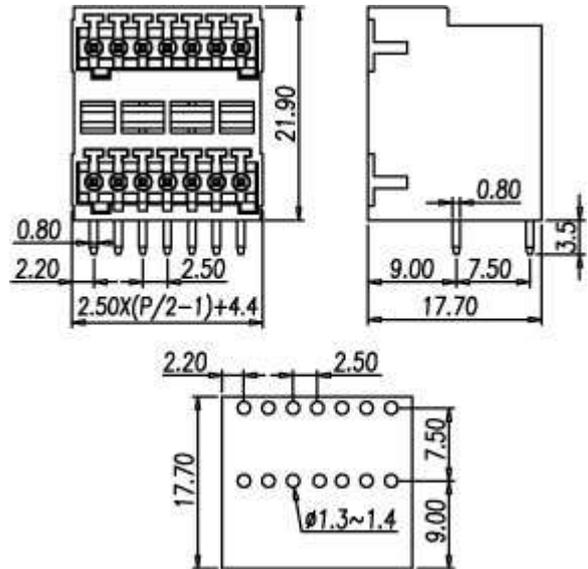

Pitch: 2.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	150V	
Rated current	4A	
Conductor cross-section, solid (AWG/ mm ²)		
Conductor cross-section, flexible (AWG/ mm ²)		
Rated surge voltage (UL/IEC/Max.)		
Torque (N-m)		
Screw		
Wire strip length		
Pole	Cat. No.	
2x2	ECHB250R-04P	
:	:	
:	:	
22x2	ECHB250R-48P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw