


**DIN Rail terminal blocks / DK series**



**DK50**

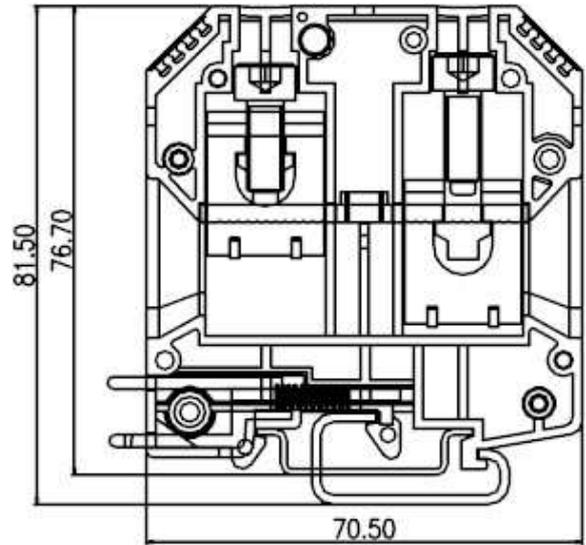

| Approval  |   |       |
|---|--|-------|
| Technical Data  | UL   | IEC   |
| Rated voltage   | 600V   | 1000V |
| Rated current   | 150A   | 150A  |
| Conductor cross-section, solid (AWG / mm <sup>2</sup> )                             | 6~2(105A) / 16~50  |       |
| Conductor cross-section, flexible (AWG / mm <sup>2</sup> )                          | 6~1/0 / 16~50  |       |
| Rated impulse withstand voltage   | 8KV  |       |
| Torque (N-m)  | 5.6  |       |
| Screw   | M6   |       |
| Wire strip length   | 25~30mm  |       |
| Insulating material   | PA   |       |
| TxHxW (mm)  | 20 x 75.8 x 70.5   |       |
| Optional color  | Cat. No.   |       |
|  | DK50-RD  |       |
|  | DK50-BL  |       |
|  | DK50-BK  |       |
|  | DK50-OR  |       |



|                  | Accessories | Cat. No.      |
|------------------|-------------|---------------|
| End cover        |             |               |
| Partition        |             |               |
| Small partition  |             |               |
| Insertion bridge |             |               |
| Insertion bridge | 2 way       | CSC-5002P     |
|                  | :           | :             |
|                  | :           | :             |
|                  | 5 way       | CSC-5005P     |
| Screw-on bridge  |             |               |
| Marking label    |             | TM28          |
| Mounting Rail    |             | TS-35 / TS-32 |
| Tool             |             |               |
|                  |             |               |
|                  |             |               |
|                  |             |               |