


**DIN Rail terminal blocks / DK series**



**DK95**

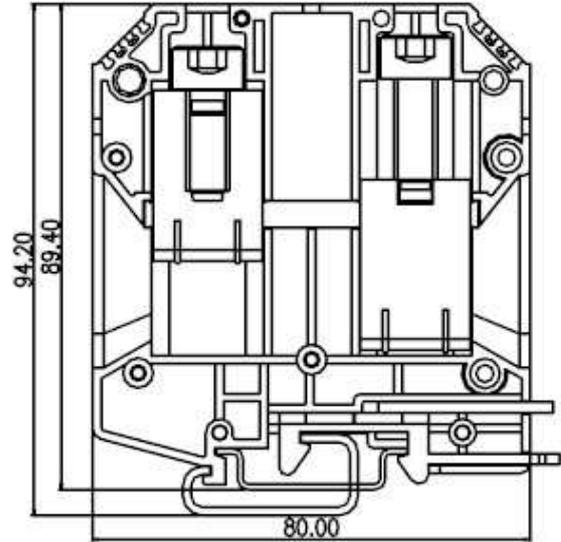

Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	230A	232A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	2(100A) / 35~95	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	2~4/0 / 35~95	
Rated impulse withstand voltage	8KV	
Torque (N-m)	10	
Screw	M8	
Wire strip length	30~35mm	
Insulating material	PA	
TxHxW (mm)	32.2 x 88.5 x 80	
Optional color	Cat. No.	
<span style="color: red;">●</span>	DK95-RD	
<span style="color: blue;">●</span>	DK95-BL	
<span style="color: black;">●</span>	DK95-BK	
<span style="color: orange;">●</span>	DK95-OR	



	Accessories	Cat. No.
End cover		
Partition		
Small partition		
Insertion bridge		
Insertion bridge	2 way	CSC-9502P
	3 way	CSC-9503P
Screw-on bridge		
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		