


**DIN Rail terminal blocks / DK series**



**DK240**

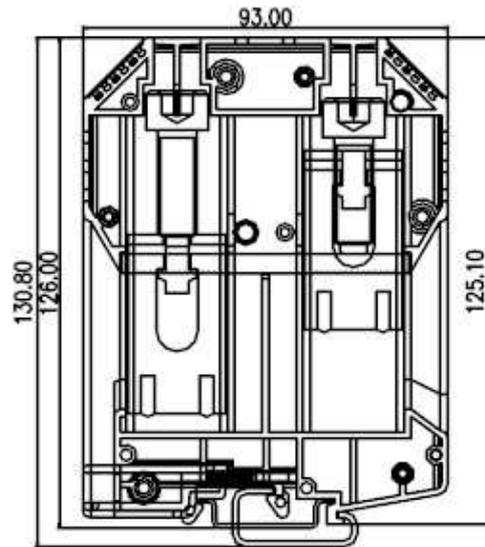

Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	370A	415A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	95~240	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	300~500 / 95~240 Kcmil	
Rated impulse withstand voltage	8KV	
Torque (N-m)	19	
Screw	M10	
Wire strip length	30~40mm	
Insulating material	PA	
TxHxW (mm)	43 x 125.1 x 93	
Optional color	Cat. No.	
	DK240-RD	
	DK240-BL	
	DK240-BK	
	DK240-OR	



	Accessories	Cat. No.
End cover		
Partition		
Small partition		
Insertion bridge		
Insertion bridge	2 way	CSC-24002P
	3 way	CSC-24003P
Screw-on bridge		
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		