


Panel Mounting Series / PM..N series

PM2.5N

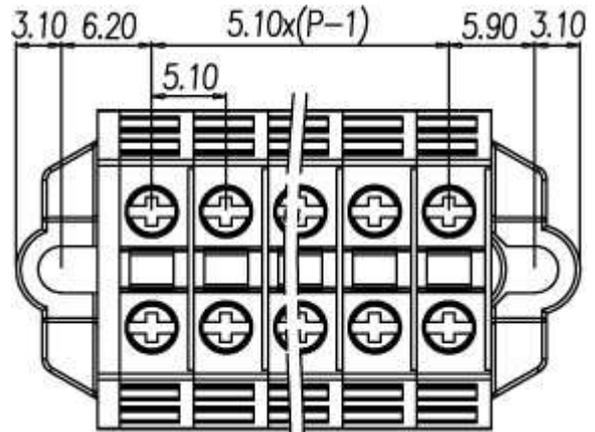


Approval		
Technical Data	UL	IEC
Rated voltage	300V	500V
Rated current	20A	24A
Conductor cross-section, solid (AWG / mm ²)	22~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG / mm ²)	22~12 / 0.5~2.5	
Rated impulse withstand voltage	7KV	
Torque (N-m)	0.39	
Screw	M2.5	
Wire strip length	6~8mm	
Insulating material	PA	
TxHxW (mm)	5.1x20x22	
Optional color	Cat. No.	
●	PM2.5N-XXP-OR	
●	PM2.5N-XXP-YG	

	Accessories	Cat. No.
End cover		PM2.5NC
Insertion bridge	2 way	CSC-2.502S
	3 way	CSC-2.503S
	4 way	CSC-2.504S
	10 way	CSC-2.510S
Marking label		TM20
Tool		

	Pole	Cat. No.
	01P	PM2.5N-01P
	02P	PM2.5N-02P
	03P	PM2.5N-03P
	:	:
	12P	PM2.5N-12P

Dimension

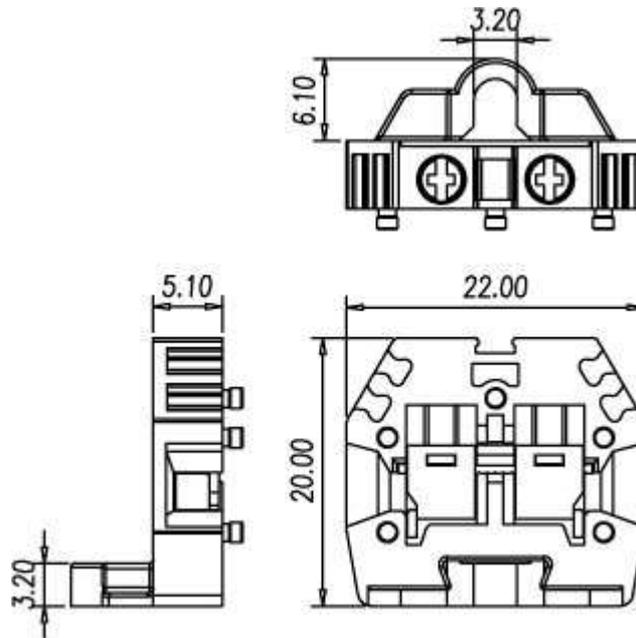

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw