



Panel Mounting Series / PM..N series

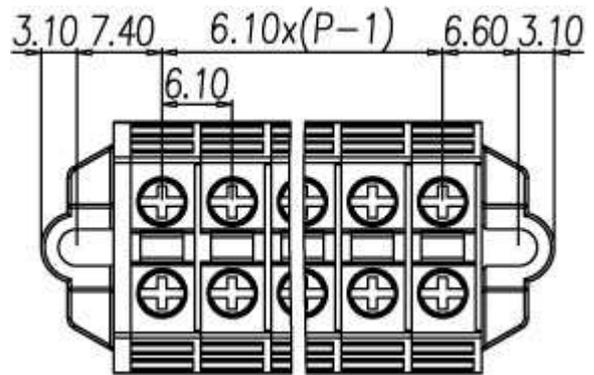

**PM4N**

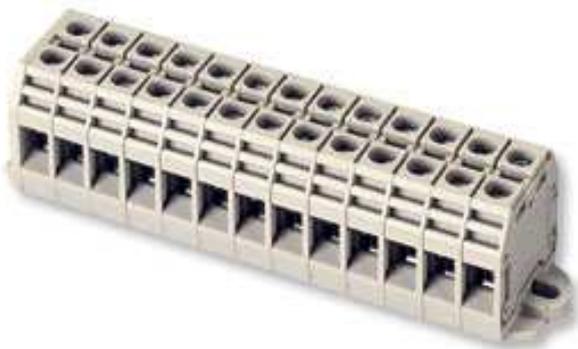


Approval		
Technical Data	UL	IEC
Rated voltage	300V	500V
Rated current	30A	32A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	22~10 / 0.5~4	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	22~10 / 0.5~4	
Rated impulse withstand voltage	7KV	
Torque (N-m)	0.49	
Screw	M3	
Wire strip length	6~8mm	
Insulating material	PA	
TxHxW (mm)	6.1x22x23	
Optional color	Cat. No.	
	PM4N-XXP-OR	
	PM4N-XXP-YG	

	Accessories	Cat. No.
End cover		PM4NC
Insertion bridge	2 way	CSC-402S
	3 way	CSC-403S
	4 way	CSC-404S
	10 way	CSC-410S
Marking label		TM21
Tool		

	Pole	Cat. No.
	01P	PM4N-01P
	02P	PM4N-02P
	03P	PM4N-03P
	:	:
	12P	PM4N-12P

Dimension

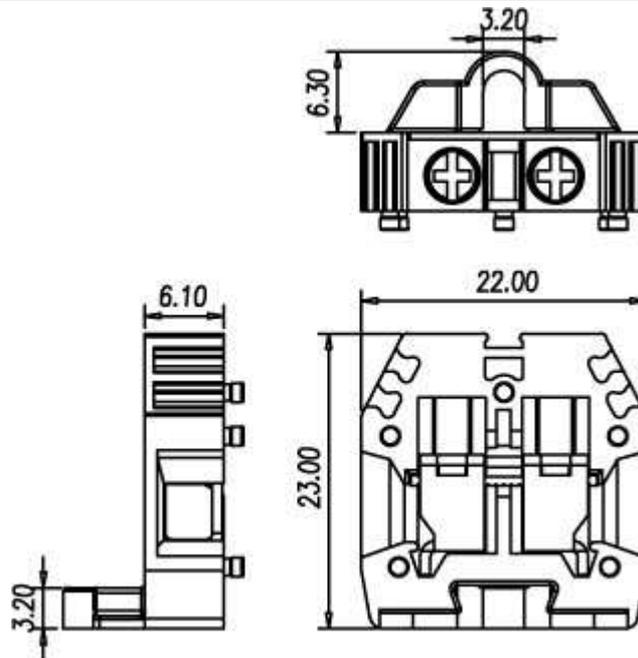

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: [infor@dinkle.com.tw](mailto:infor@dinkle.com.tw)