



Panel Mounting Series / PM..WS series

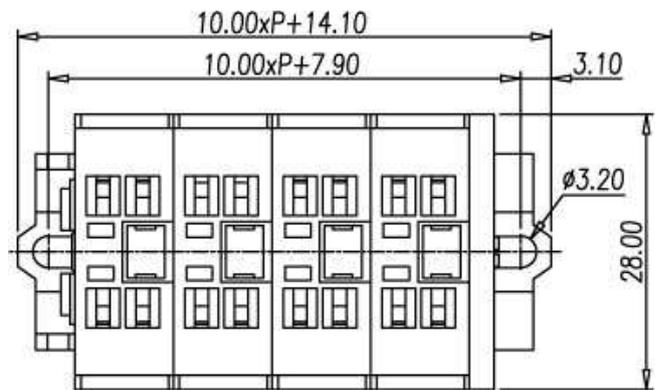

PMM2.5WS

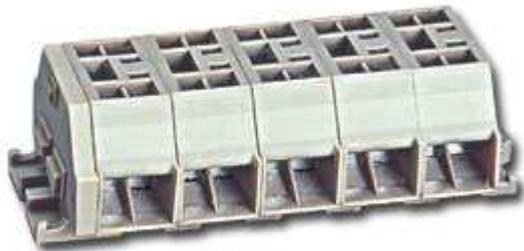

Approval		
Technical Data	UL	IEC
Rated voltage	600V	660V
Rated current	25A	24A
Conductor cross-section, solid (AWG / mm ²)	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG / mm ²)	14~12 / 0.5~2.5	
Rated impulse withstand voltage	8KV	
Torque (N-m)		
Screw		
Wire strip length	7~8mm	
Insulating material	PA	
TxHxW (mm)	10x28x18	
Optional color	Cat. No.	
●	PMM2.5WS-XXP-OR	
●	PMM2.5WS-XXP-YG	

	Accessories	Cat. No.
End cover		PM2.5WSC
Insertion bridge	2 way	DS-204
Marking label		TM20
Tool		0.4x2.5mm

	Pole	Cat. No.
	01P	PMM2.5WS-01P
	02P	PMM2.5WS-02P
	03P	PMM2.5WS-03P
	:	:
	12P	PMM2.5WS-12P

Dimension

